




C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

GLASS CLAMPS

90° Glass Clamp
(Glass-to-Glass Application)

CAT. No. GCB90

CAT. No. GCB690

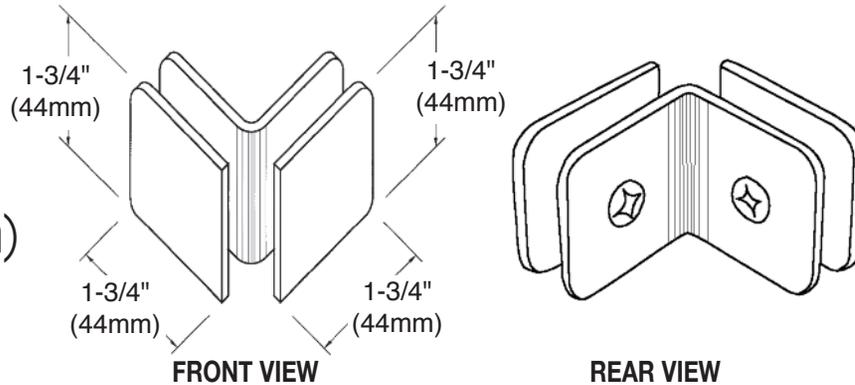

Note: The Clamps shown on this page can also be used in a wall-to-glass application. For information on this see pages 4X-7 and 4X-8.


Specifications:

Material: Solid brass
Glass Thickness Range:
GCB90 = 5/16" (8mm) to 1/2" (12mm)
GCB690 = 1/4" (6mm)
Hole Size Required: 5/8" (16mm) or 3/4" (19mm)
Includes: Mounting screws and gaskets
Note: An additional set of gaskets is required for 5/16" (8mm) glass

GLASS CLAMPS

90° Square Glass Clamp
(Glass-to-Glass Application)

CAT. No. SGC0F90

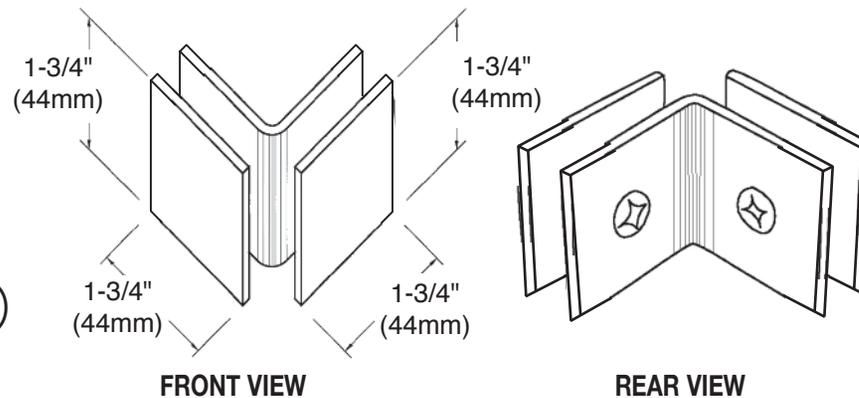

Specifications:


Material: Solid brass
Glass Thickness : 3/8" (10mm) or 1/2" (12mm)
Hole Size Required: 5/8" (16mm) or 3/4" (19mm)
Includes: Mounting screws and gaskets

Template Shown on Next Page

GLASS CLAMPS

Monaco Glass Clamp

CAT. No. M0690

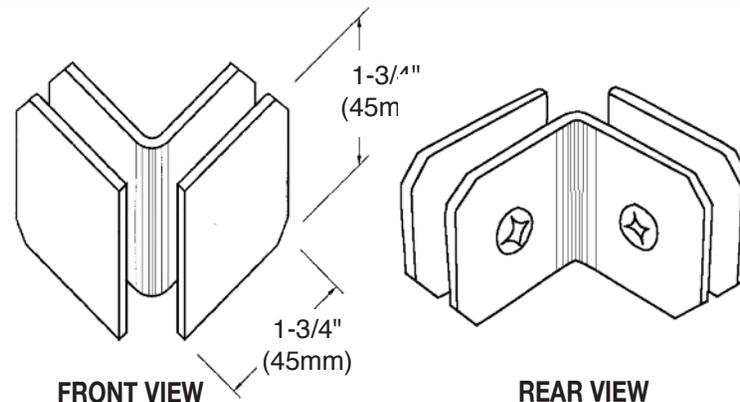

Specifications:



Material: Solid brass
Glass Thickness : 1/4" (6mm) TO 5/16" (8mm)
Hole Size Required: 5/8" (16mm) or 3/4" (19mm)
Includes: Mounting screws and gaskets

Template Shown on Next Page


4X-5

TYPICAL INSTALLATION

Important:
Project measurements from the edge of the glass.

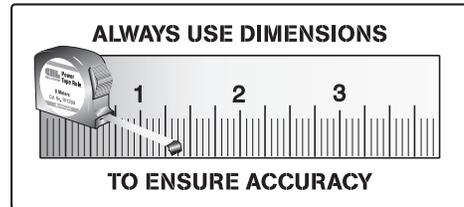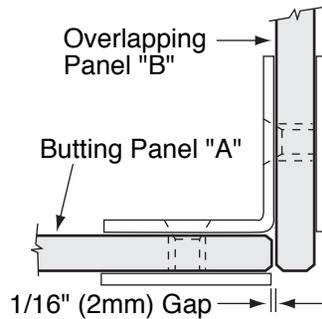

TEMPLATE OPTION FOR SQUARE CUT GLASS

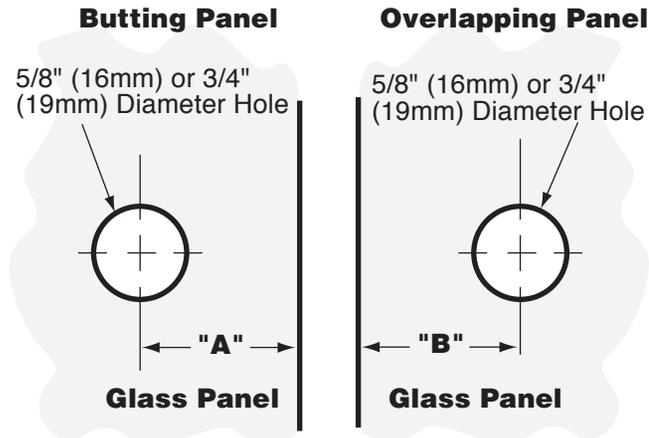

Note: The Clamps shown on this page can also be used in a wall-to-glass application. For information on this see pages 4X-7 and 4X-8.

Glass Thickness	"A" Measurement	"B" Measurement
1/4" (6mm)	15/16" (24mm)	1-1/4" (32mm)
5/16" (8mm)	15/16" (24mm)	1-5/16" (34mm)
3/8" (10mm)	15/16" (24mm)	1-3/8" (35mm)
1/2" (12mm)	15/16" (24mm)	1-1/2" (38mm)

GLASS CLAMPS

THE ABOVE TEMPLATE OPTIONS APPLY TO THE FOLLOWING CLAMPS:

90° Glass Clamp
(Glass-to-Glass Application)

CAT. No. GCB90

Junior 90° Glass Clamp
(Glass-to-Glass Application)

CAT. No. GCB690

Monaco Glass Clamp
(Glass-to-Glass Application)


CAT. No. M0690

90° Square Glass Clamp (Glass-to-Glass Application)

CAT. No. SGC0F90

TYPICAL INSTALLATION

Important:
Project measurements from the outside of the mitered glass.

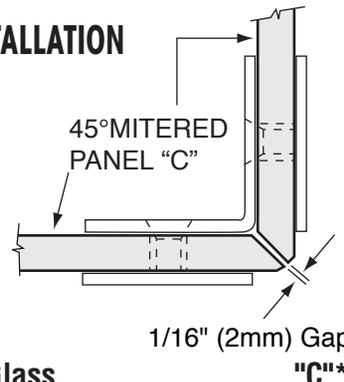

Glass Thickness	Measurement
1/4" (6mm)	1-3/16" (30mm)
5/16" (8mm)	1-1/4" (32mm)
3/8" (10mm)	1-5/16" (34mm)
1/2" (12mm)	1-7/16" (37mm)

*From outside edge of miter

TEMPLATE OPTION FOR 45° MITERED GLASS

