

PRIMA

Wall Mount Hinge CAT. NO. PPH03

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

Important Information:

Template Options: The Prima Wall Mount PPH03 Hinge offers two template options, depending upon the capabilities of the temperer (see lower left of this page). The Preferred Method allows a full vertical seal along the hinge side, the Alternate Method leaves a short leg of glass, thus not allowing a full length vertical seal.

Vertical Clearances: Optional 5° Pivot Pins (Cat.. No. P1VP1N) are sold as a set, one pin for the top hinge and one pin for the bottom hinge. These 5° offset Pivot Pins allow the installer to adjust the closing position of the door 5° inwards or outwards. closing position of the door 5° inwards or outwards.

Specifications:

Glass Sizes:	5/16" (8mm) to 3/8" (10mm) thick tempered safety glass
Construction:	Solid brass
Closing Type:	Self-centering when within 15° of closed position
Cutout Required	
Includes:	Gaskets, screws and template

Maximum Door Capacities for Two Hinges

Maximum Door Weight:	100 lbs.(46 kg)
Maximum Door Width:	31"(787mm)

Use of Gaskets:

For 5/16"(8mm) Glass: Use one thick gasket and one thin gasket on each side For 3/8"(10mm) Glass: Use one thick gasket on each side

Recommendations:


For public safety, we recommend the use of only tempered safety glass. Do not use power tools when installing these hinges.

Maintenance Guidelines:

• Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as lvory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.

For Technical Assistance in the United States and Canada 1.800.421.6144. Press 2, then option 1

CRL_°

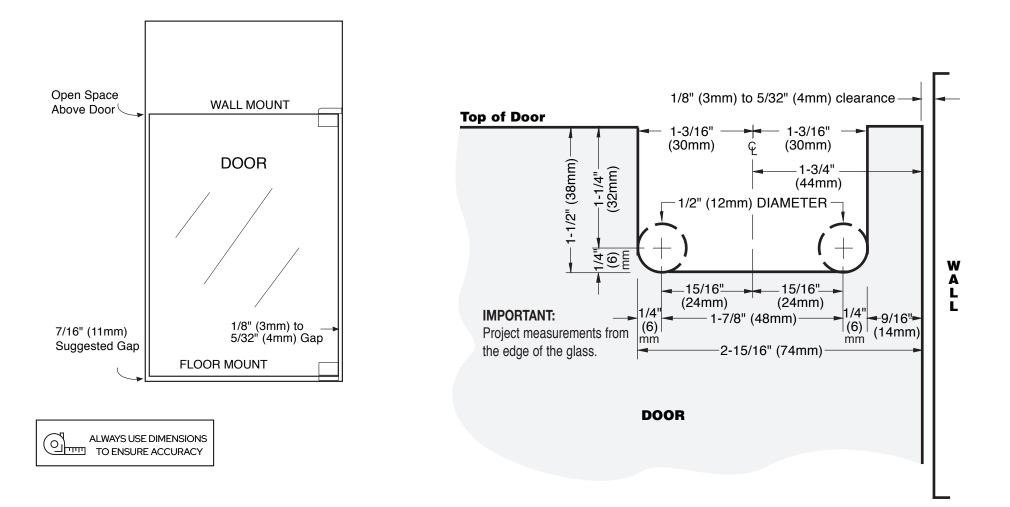


PRIMA

Wall Mount Hinge CAT. NO. PPH03 Wall Mount Preferred Method (Even with top of door)

For Technical Assistance in the United States and Canada 1.800.421.6144. Press 2, then option 1

CRL_°

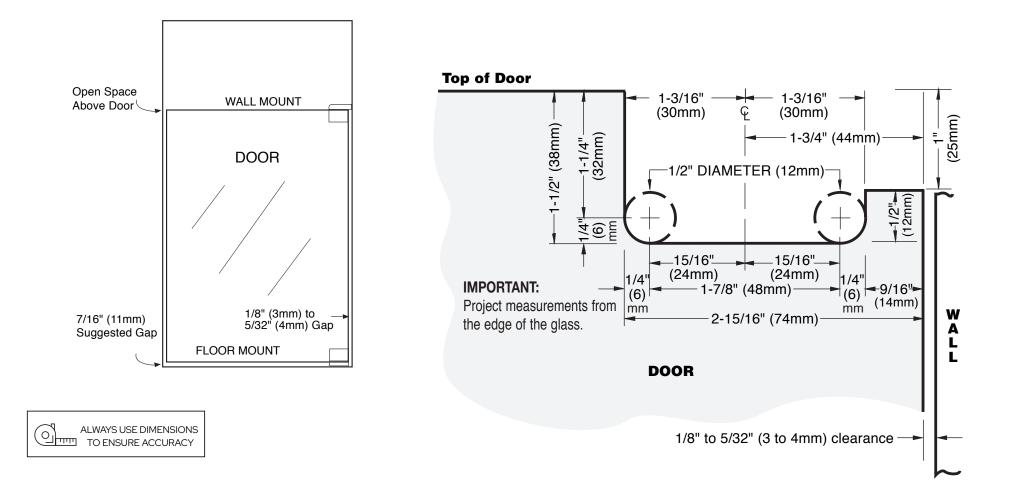

PRIMA

Wall Mount Hinge CAT. NO. PPH03 Wall Mount Alternate Method (Even with top of door)

For Technical Assistance in the United States and Canada 1.800.421.6144. Press 2, then option 1 C.R. Laurence Co., Inc. • 2503 E. Vernon Ave., Los Angeles, CA 90058 • 1.800.421.6144 • crlaurence. 4H-17