

ENTRANCES

SERIES 250

NARROW STILE ALUMINUM DOORS

For Light to Moderate Traffic



CRL US ALUMINUM
DOORS IN STOCK
READY TO GO!



- Ready for Immediate Pick Up!
- For 1/4 " or 1" (6 or 25 mm) Glazing
- Adjustable Weatherstrip Astragal at Meeting Stiles
- Accommodates Most Custom Hardware
- Standard 1" (25 mm) Diameter Solid Push/Pulls
- Exterior and Interior Applications
- Available for Center Hung, Offset Pivot, or Butt Hinge Applications
- Choice of Standard or A.D.A. Access Bottom Rails
- Clear Anodized and Bronze Anodized in Single or Pairs of Doors
- Custom Sizes, Finishes, and Options Available



Series 250
Narrow Stile

When you need a quality door in a hurry, our **Stock Door Program** is the solution. U.S. Aluminum now offers our most popular narrow stile door and frame configurations available for immediate pick up! For exterior and interior applications, both Clear Anodized and Bronze Anodized finishes are offered as single doors or in pairs in two versions: Offset Pivot and Butt Hinged. Continuous Geared Hinges are also available on special order.

These Doors include standard 2" (51 mm) Stiles, 2-1/8" (54 mm) Top Rails, and your choice of Standard 3-3/16" (81 mm) Bottom Rails or 9-1/2" (241 mm) A.D.A. Access Bottom Rails. Other standard features include a Push Bar, Offset Pull Handle, Panic Exit Devices (Select Models), Lock Cylinder, Glass Stops, and Glazing Gaskets. You supply the 1/4" (6 mm) tempered glass. Optional glass stops are available for 1" (25 mm) infills.










A CRH COMPANY

usalum.com • crlaurence.com
crl-arch.com

SERIES 250 NARROW STILE TYPICAL DETAILS

For 1/4" (6 mm) or 1" (25 mm) Glazing

For Specifications, Details, and Testing Data go to usalum.com.

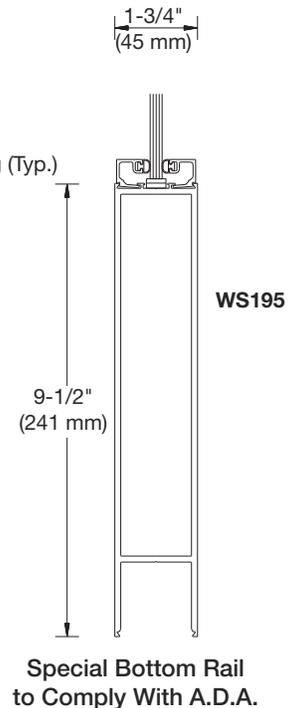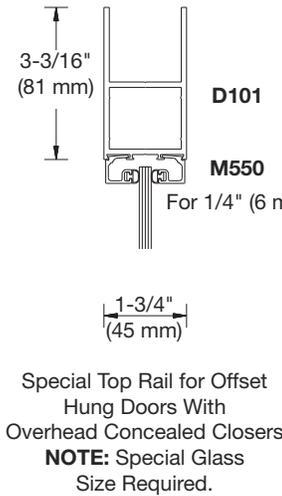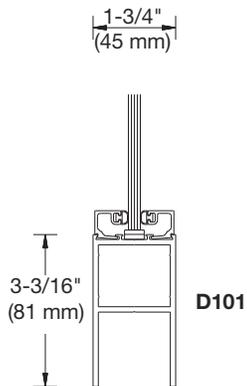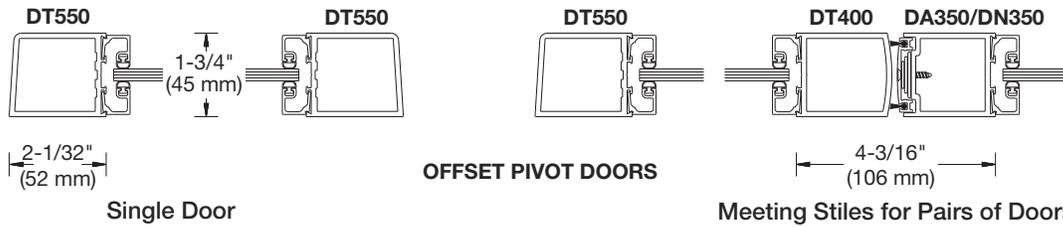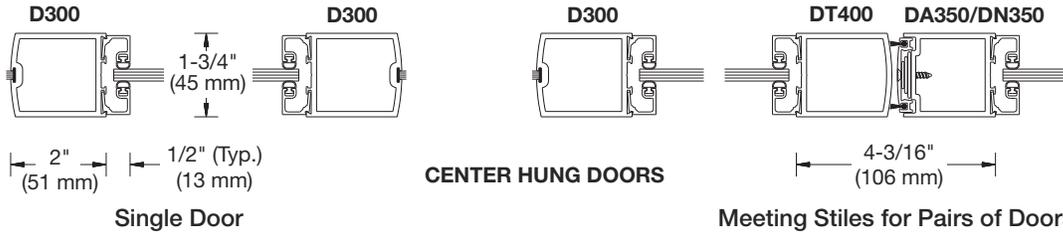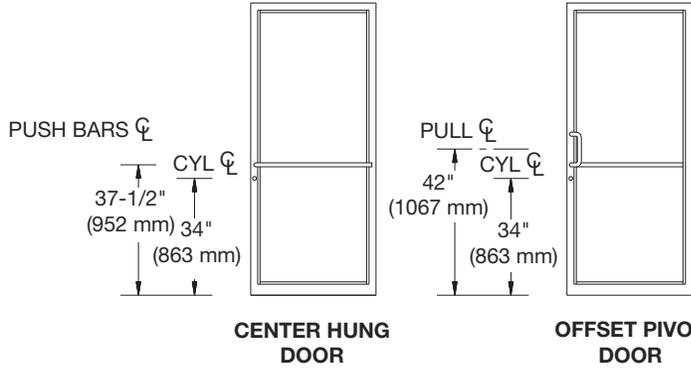

NOT TO SCALE