


CURTAIN WALLS

SERIES 4250 & 4250T CURTAIN WALL




- 2-1/2" x 6" (63 x 152 mm) System Dimensions
- Stick Wall Installation
- Interior Glazed
- Injection Molded Water Deflectors
- Thermal or Non-Thermal Versions
- No Exposed Fasteners
- Shear Block Assembly

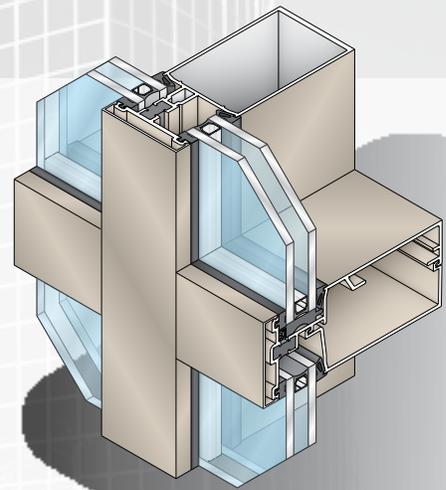



Series 4250 Curtain Wall is a stick-erected, interior-glazed curtain wall utilizing a pocket set design and E.P.D.M. compression glazing gaskets. This system features the Poly-Aluminizer™ and Struct-Link™ thermal break technology. It was specifically engineered to satisfy the increasing demands for energy conservation. Dual or two-tone colors can be achieved by specifying different finishes for the exterior face covers and the interior mullions. Two piece horizontals and shear blocks allow for a concealed horizontal to vertical joint without exposed screws. Vertical to horizontal intersections have concealed injection molded plastic end dams for controlling any infiltrated water. Specify Series 4250T for the thermally broken version.

SERIES 4250 TYPICAL DETAILS

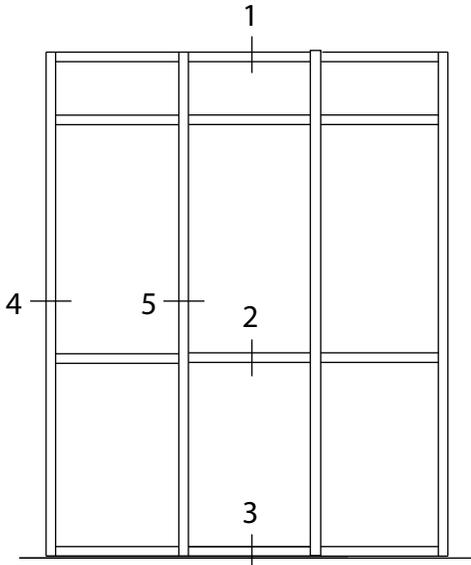

TYPICAL ELEVATION

For Specifications, Details, and Testing Data go to usalum.com.

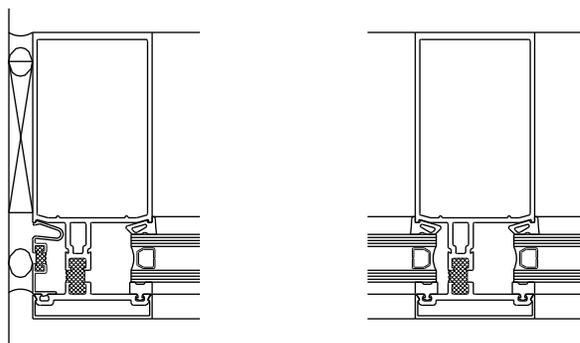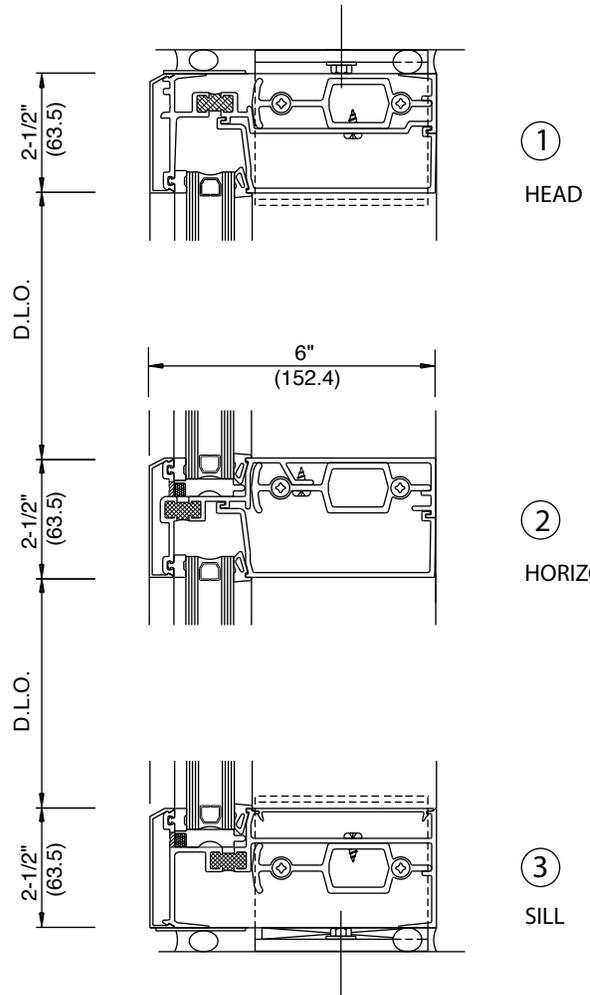

④
JAMB

⑤
VERTICAL

NOT TO SCALE