


# ENTRANCES

## SERIES 800 & 850 DURAFRONT DOORS



- Series 800 Medium Stile
- Series 850 Wide Stile
- 3/16" (4.8 mm) Wall Thickness
- Lifetime Warranty on Corner Construction
- Mechanically Fastened and Welded Corners
- Heavy-Duty Hinges, Pivot Sets or Continuous Gear Hinge

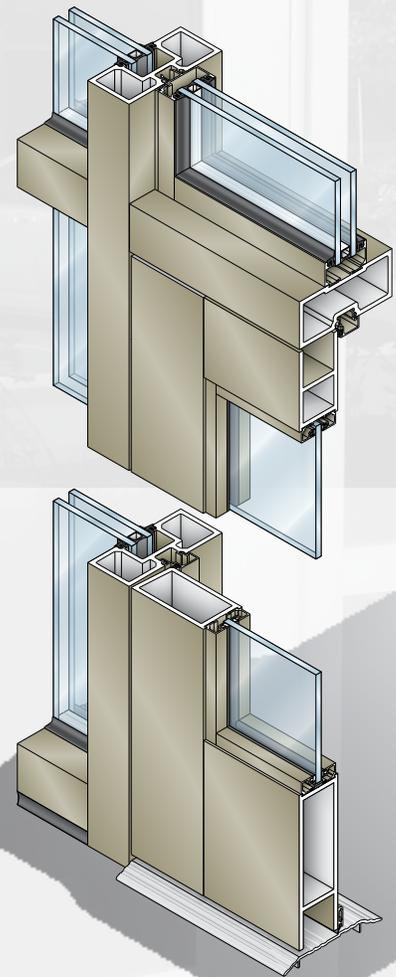


Durafront Doors and Frames are fabricated from tubular aluminum extrusions with a wall thickness of 3/16" (4.8 mm). These extra strong, long-lasting entrance packages are ideal for locations subjected to extremely high traffic flow. Durafront Entrance Packages are offered for center and offset hung doors. Offset hung doors are supplied with a pair and a half of heavy-duty hinges, pivot sets, or a continuous gear hinge. A variety of custom hardware is available upon request.


# DURAFRONT SERIES 800/850 TYPICAL DETAILS

## Series 800

For Specifications, Details, and Testing Data go to [usalum.com](http://usalum.com).

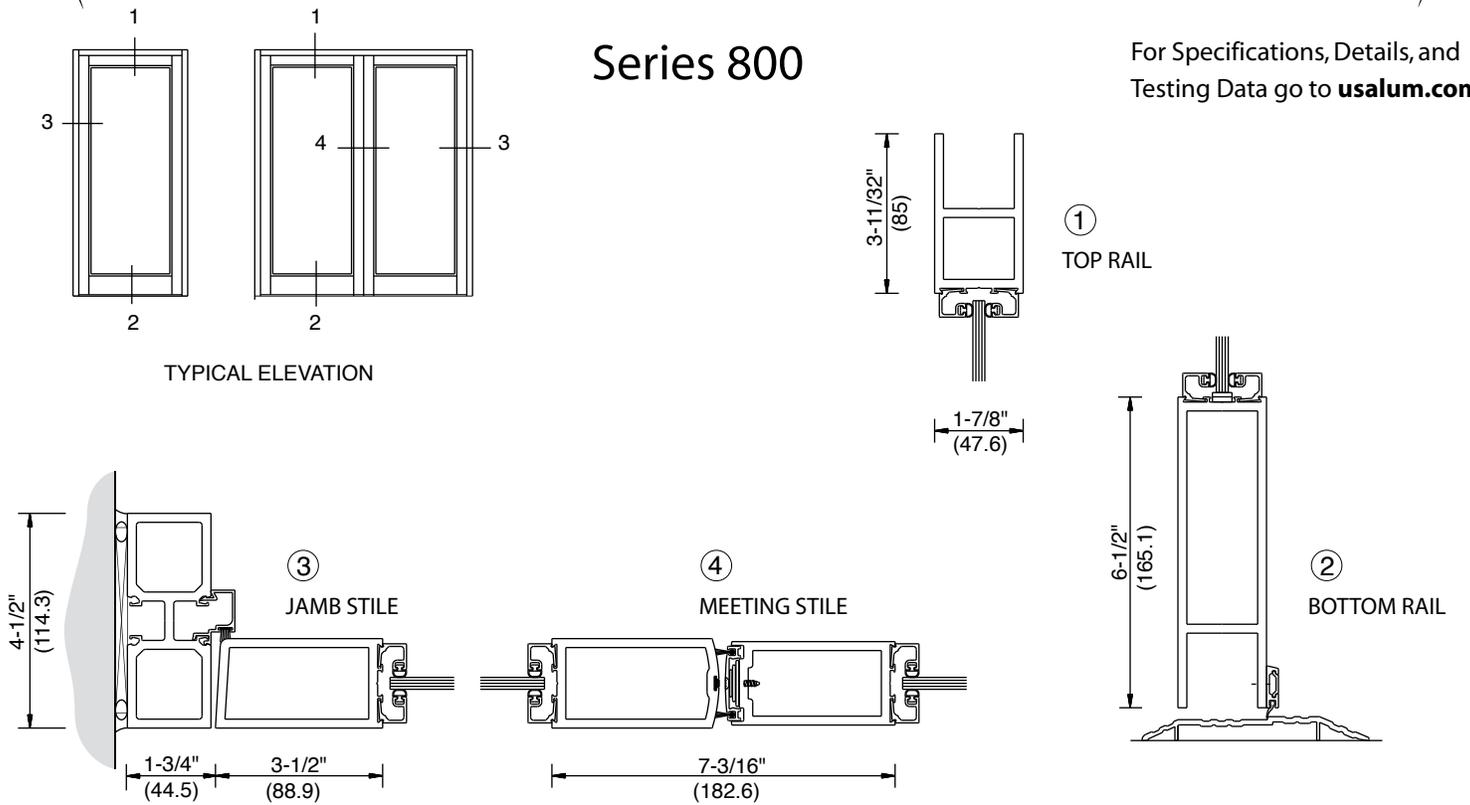

## Series 850

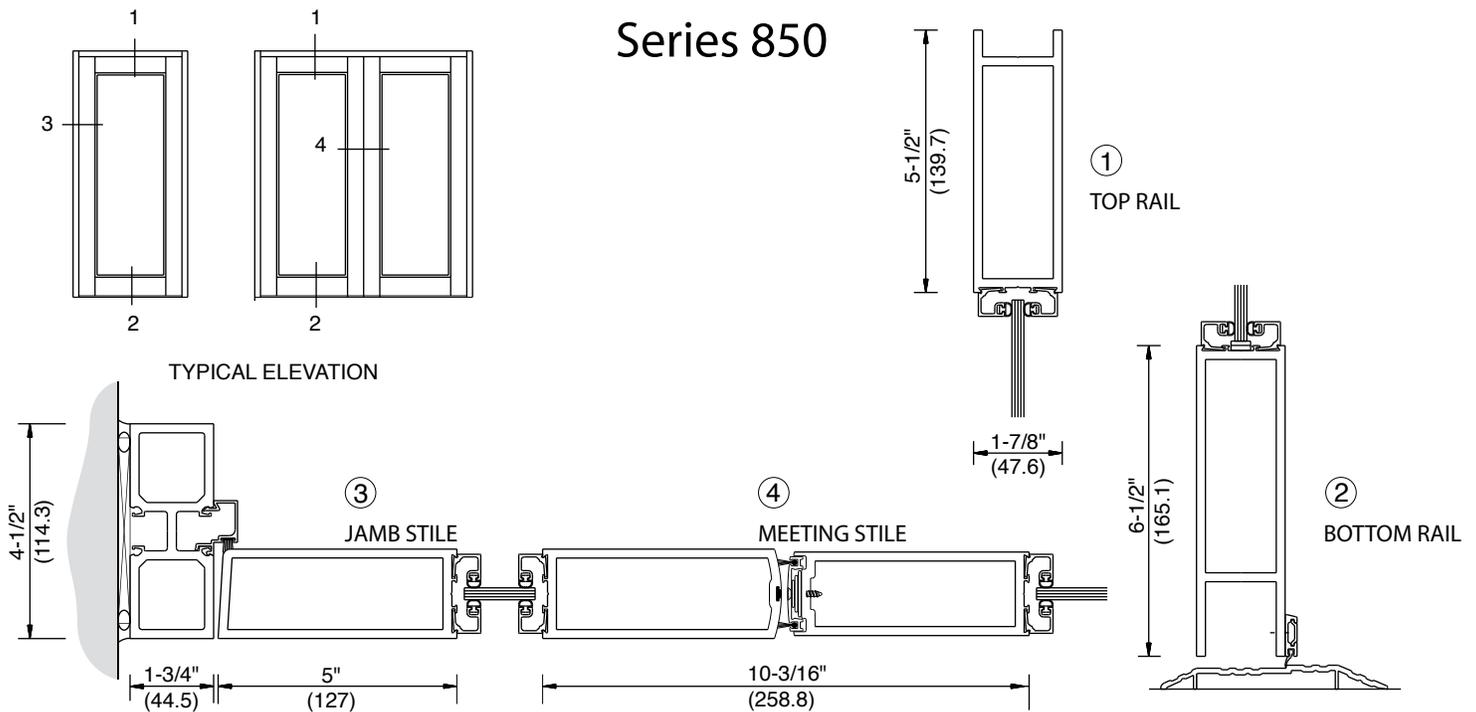

NOT TO SCALE