CRL


Note: The Clamps shown on this page can also be used in a wall-to-glass application. For information on this see pages 4T-7 and 4T-8.


1-3/4" 1-3/4" (44mm) (44mm) **GLASS CLAMPS** ()90° Glass Clamp (Glass-to-Glass Application) 1-3/4" 1-3/4" CAT. NO. GCB90 (44mm) (44mm) FRONT VIEW REAR VIEW

Specifications:

Material:	Solid brass
Glass Thickness Range:	5/16" (8mm) to 1/2" (12mm)
Hole Size Required:	5/8" (16mm) or 3/4" (19mm)
Includes:	Mounting screws and gaskets
Note:	Additional set of gaskets is required for 5/16" (8mm)

Template Shown on Next Page

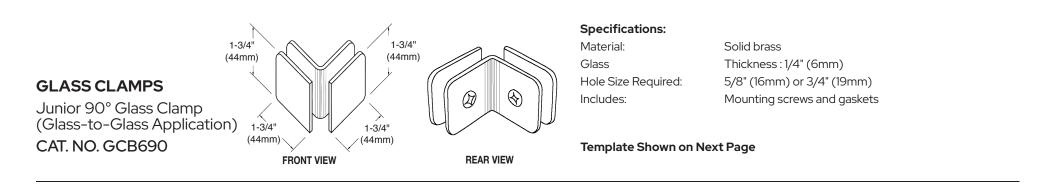

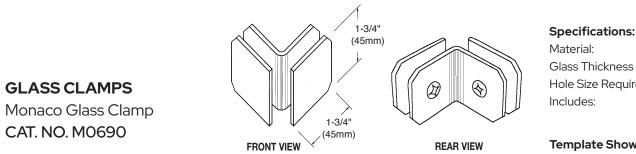

	Solid brass
iness :	1/4" (6mm) TO 5/16" (8mm)
lequired:	5/8" (16mm) or 3/4" (19mm)
	Mounting screws and gaskets


Template Shown on Next Page

*NOTE: Do not exceed either maximum weight or width when choosing proper quantity of hinges.

For Technical Assistance in the United States and Canada 1.800.421.6144. Press 2, then option 1




IMPORTANT: Project measurements from the edge of the glass.

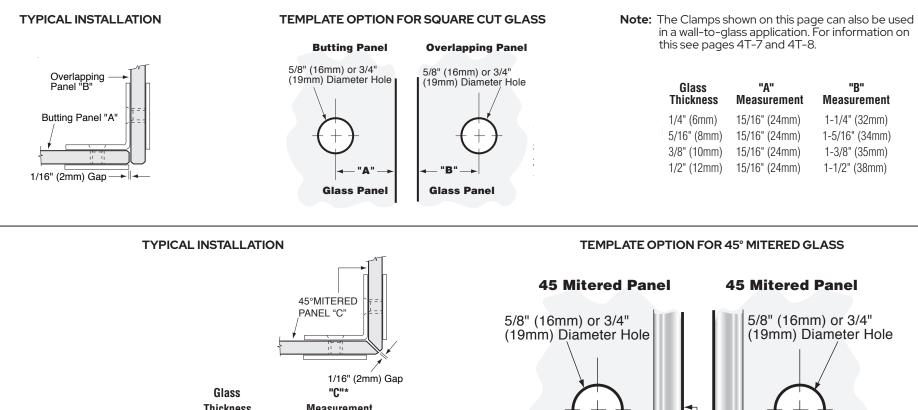

ALWAYS USE DIMENSIONS TO ENSURE ACCURACY



Measurement 1-3/16" (30mm) 1-1/4" (32mm) 1-5/16" (34mm) 1-7/16" (37mm)

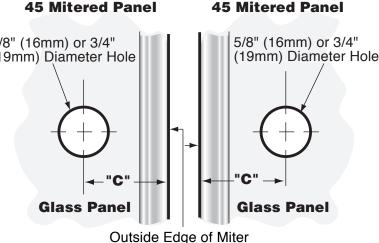

GLASS CLAMPS (Glass-to-Glass Application)

THE ABOVE TEMPLATE OPTIONS APPLY TO THE FOLLOWING CLAMPS:

90° Glass Clamp | Junior 90° Glass Clamp | Monaco Glass Clamp CAT. NO. GCB90 | CAT. NO. GCB690 | CAT. NO. M0690