


INSTALLATION OF PACKAGE RECEIVER

- 1) Remove door handles from inside of doors and reinstall to the front of the doors.
- 2) Remove rear door at hinge.
- 3) Remove rear adjustable flange. Tighten lock knob in locking position to keep front door closed during installation.
- 4) Set package receiver in wall opening.
- 5) With package receiver in wall slip rear flange over receiver box and attach to box so as to hold receiver box firmly in wall.
- 6) Reassemble rear door.

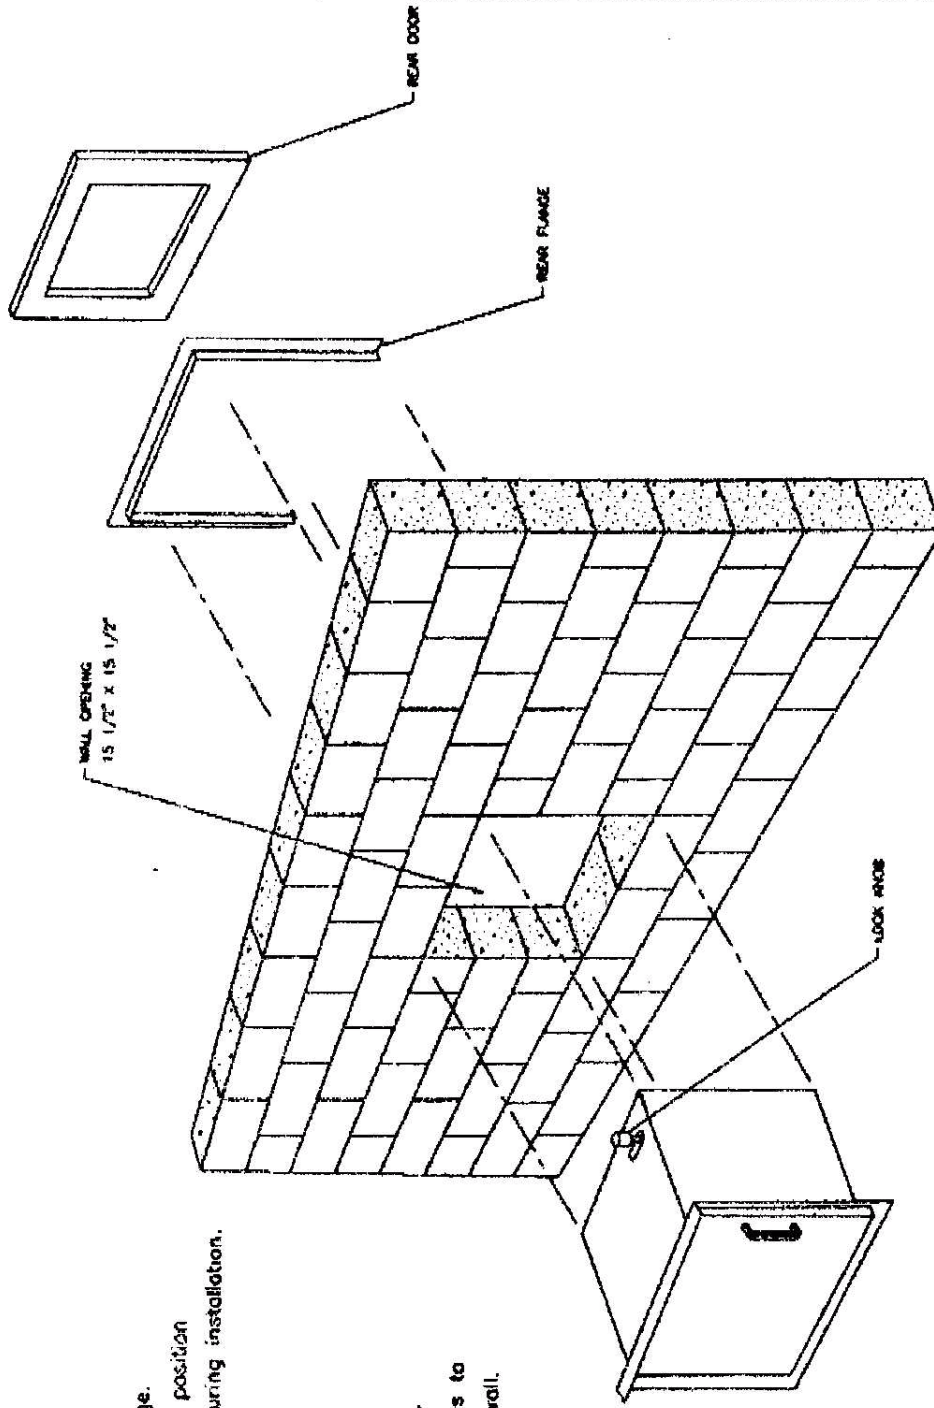

C. R. Laurence Co., Inc. 13000 S. FIGUEROA ST. GARDENA, CALIFORNIA 90247-7038 PHONE (310) 718-9770 FAX (310) 328-1321 CIRCLE 10		DATE: 11/31/95 ORDER NUMBER: PPR/SPR	
REV. DESCRIPTION DATE BY		PART: PPR/SPR/SPRVP PRODUCT: PACKAGE RECEIVER MATL: INSTALLATION INSTRUCTIONS	
ONE ORDER AND THE OTHER FROM INSTRUCTIONS IS THE PROPERTY OF C.R. LAURENCE CO., INC. AND WILL BE FORWARDED TO YOU WITHOUT CHARGE.		DRAWING NUMBER: PPR/SPR	