



# C.R. LAURENCE CO. INC

## Mounting Instructions Stainless Steel Shelves



Section-AA

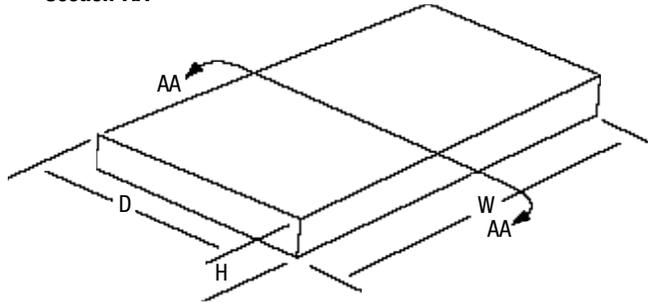


### Stainless Steel Shelves

CAT NO.	WIDTH	DEPTH	HEIGHT
SSS2412	24"	12"	2"
SSS3012	30"	12"	2"
SSS3612	36"	12"	2"
SSS4812	48"	12"	2"
SSS6012	60"	12"	2"
SSS7212	72"	12"	2"
SSS2418	24"	18"	2"
SSS3018	30"	18"	2"
SSS3618	36"	18"	2"
SSS4818	48"	18"	2"
SSS6018	60"	18"	2"
SSS7218	72"	18"	2"


### THROUGH-SHELF MOUNTING

Shelves can be mounted from the top by drilling and countersinking the shelf surface in the appropriate attachment area, then securing with screws of adequate length (not included). Additional strength can be obtained by applying a few beads of construction sealant, **CRL CAT. NO. M64** (select color), between the bottom of the shelf and the top of the supporting wall.





### UNDER-SHELF MOUNTING

Shelves can be mounted from underneath by securing angle cleats or 2 x 2 boards to both sides of the wall. Mount boards or cleats even with the bottom of the opening. Install shelf and secure it from the underside using screws of adequate length (not included). Additional strength can be obtained by applying a few beads of construction sealant, **CRL CAT. NO. M64** (select color), between the bottom of the shelf and the top of the supporting wall.



### MOUNTING USING OPTIONAL STAINLESS STEEL SHELF BRACKETS

Shelves can be mounted using optional Stainless Steel Shelf Brackets listed below. Secure the brackets to both sides of the wall, even with the bottom of the opening. Install the shelf and secure it from the underside using screws of adequate length (not included). Additional strength can be obtained by applying a few beads of construction sealant, **CRL CAT. NO. M64** (select color), between the bottom of the shelf and the top of the supporting wall.

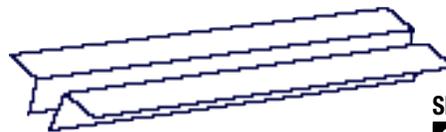

### STAINLESS STEEL SHELF BRACKETS (OPTIONAL)

Stainless Steel Shelf Brackets are available in seven lengths from 24" to 96". They are made from 1-1/2" x 1-1/2" 16 gauge brushed stainless steel angle to match the shelf finish. Brackets are not drilled, so the installer has the option of drilling holes only where they are needed. Brackets are sold only in pairs.

### Shelf Brackets

CAT. NO.	LENGTH
SSSB24	24"
SSSB30	30"
SSSB36	36"
SSSB48	48"
SSSB60	60"
SSSB72	72"
SSSB96	96"