

PETITE 180°

180° Glass-to-Glass Hinge (Door Swings 90° In and 90° Out) CAT. NO. PET180

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

Important Information:

Door and fixed panel use the same cutout.

Specifications:

Glass Sizes:	1/4" (6mm) to 5/16" (8mm) thick tempered safety glass
Construction:	Solid brass
Closing Type:	Self-centering when within 15° of closed position
Cutout Required	
Includes:	Gaskets, screws and template

Maximum Door Capacities for Two Hinges or Three Hinges

Maximum Door Weight:	55 lbs. (25 kg)	82 lbs. (37 kg)
Maximum Door Width:	31" (787mm)	34" (864mm)

Use of Gaskets:

For 1/4"(6mm) Glass: Use one thick gasket on each side For 5/16"(8mm) Glass: Use one thin gasket on each side

Recommendations:

For public safety, we recommend the use of only tempered safety glass. Do not use power tools when installing these hinges.

Maintenance Guidelines:

• Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as lvory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.

For Technical Assistance in the United States and Canada 1.800.421.6144. Press 2, then option 1

C.R. Laurence Co., Inc. • 2503 E. Vernon Ave., Los Angeles, CA 90058 • 1.800.421.6144 • crlaurence.com

For Technical Assistance in the United States and Canada 1.800.421.6144. Press 2, then option 1

180° Glass-to-Glass Hinge (Door Swings 90° In and 90° Out)


CRL_®

ALWAYS USE DIMENSIONS

PETITE 180°

CAT. NO. PET180



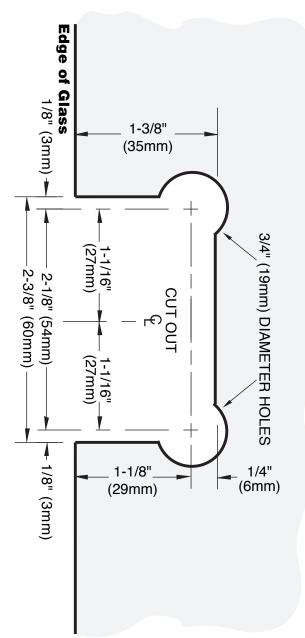

© Copyright 2022, C.R. Laurence Co., Inc SDT22 22