


DEFENDER

BLAST MITIGATION PRODUCTS

SERIES BW3250 BLAST RESISTANT CURTAIN WALL




- 2-1/2" (63 mm) Face Dimension
- 1" (25 mm) Laminated Glass
- UFC 4-010-01 Compliant
- Exterior Glazed
- Thermally Improved
- Silicone Glazed
- No Exposed Fasteners
- Accepts BW7500 Operable Windows
- Made in the USA

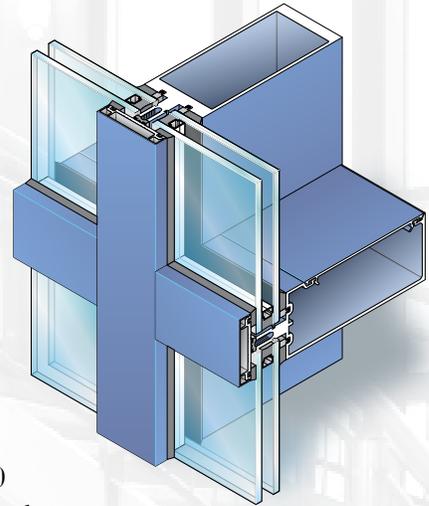



Strength, versatility, and economics make Series BW3250 Blast Resistant Curtain Wall an industry standard for low to mid-rise applications where blast protection is required. Based on our top-selling Series 3250 Curtain Wall System, the Blast Wall offers the blast mitigation protection required by the Unified Facilities Criteria 4-010-01. Series BW3250 is thermally improved by a continuous thermal spacer interlocked with horizontal and vertical pressure plates. Dual or two-tone colors can be achieved by specifying different finishes for the exterior face covers and interior mullions. Two piece horizontals and extruded shear blocks allow for a concealed horizontal to vertical joint.

SERIES BW3250 BLAST WALL TYPICAL DETAILS

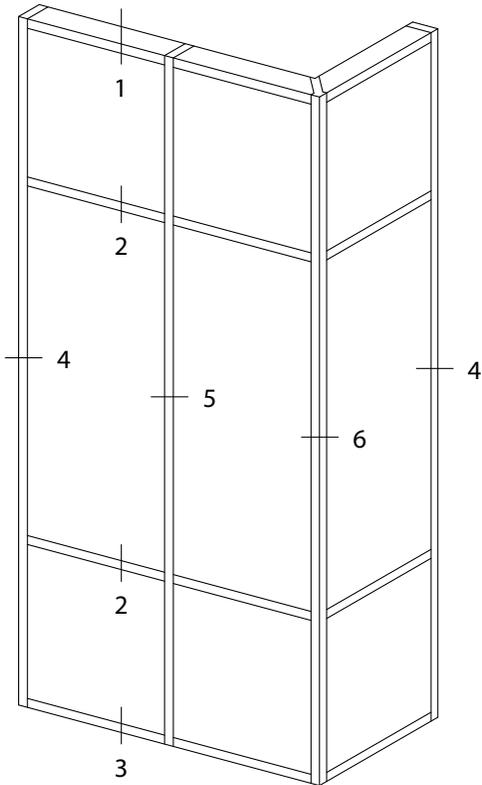


TYPICAL ELEVATION


Air:	< .06 CFM
Water:	15 PSF
Structural:	25 PSF
CRF:	66
U Value:	.35

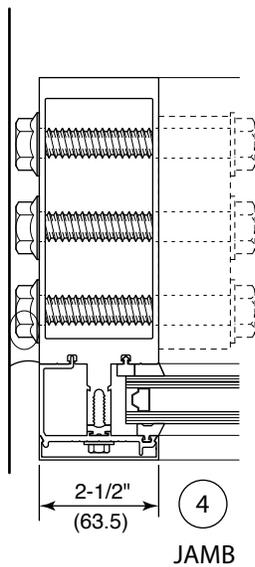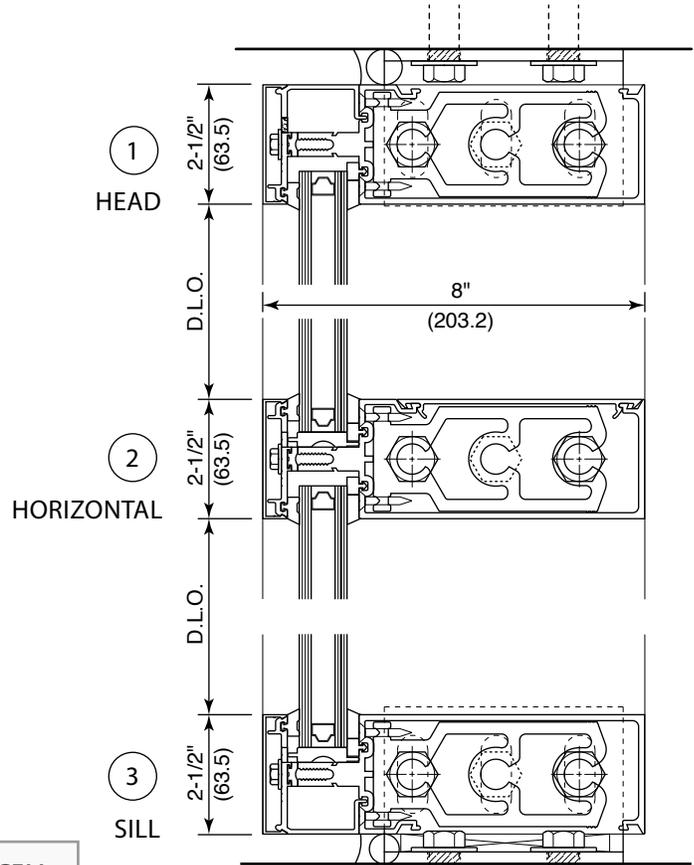

JAMB

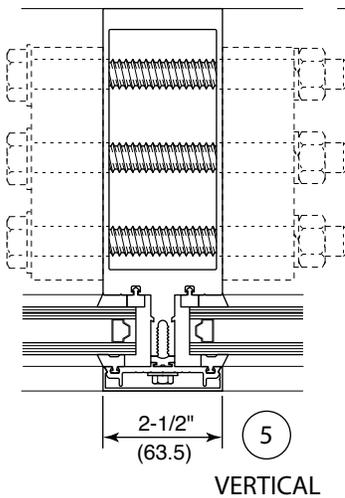

VERTICAL

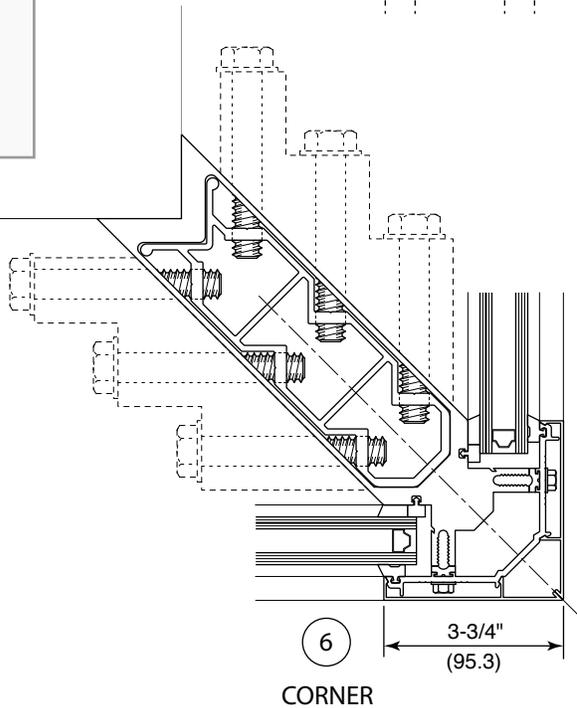

CORNER

NOT TO SCALE