


CAT. NO. PTH25

CRL RADIUS LOCK PATCH


(Top, Bottom or Sideways Mount Lock Patch)

Centerline in the appropriate position




Recommended Clearances

Side Clearances "S"	1/8" (3mm)
Top Clearance "T"	1/8" (3mm) for Glass Transom 1/4" (6mm) for Regular and Header



EDGE OF GLASS

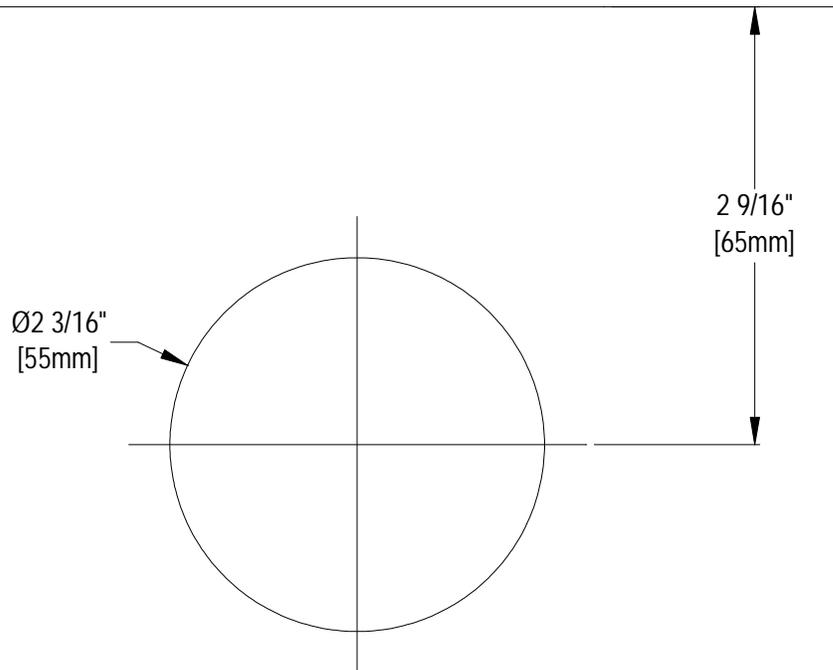

NOTE: The above template is for Top Mounted Locks. For bottom mounting rotate the template 180°. For side mounting rotate 90° either right or left. Centerline the lock opposite the Keeper.