

### CONCORD (FORMERLY LALIQUE)

Wall Mount Hinge

CAT NO. SDH037

**\*NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

#### Specifications:

Glass Sizes: 3/8" (10mm) to 1/2" (12mm) thick tempered safety glass  
Construction: Solid brass  
Closing Type: Self-centering when within 15° of closed position  
Cutout Required  
Includes: Gaskets, screws and template

#### Maximum Door Capacities for Two Hinges or Three Hinges

|                      |                |                 |
|----------------------|----------------|-----------------|
| Maximum Door Weight: | 80 lbs.(36 kg) | 120 lbs.(55 kg) |
| Maximum Door Width:  | 28"(711mm)     | 34"(864mm)      |

#### Use of Gaskets:

For 3/8" (10mm) Glass: Use one thick gasket on each side  
For 1/2" (12mm) Glass: Use one thin gasket on each side

#### Recommendations:



For public safety, we recommend the use of only tempered safety glass.  
Do not use power tools when installing these hinges.

#### Maintenance Guidelines:

- Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as Ivory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.



**IMPORTANT:** Project measurements from the edge of the glass.

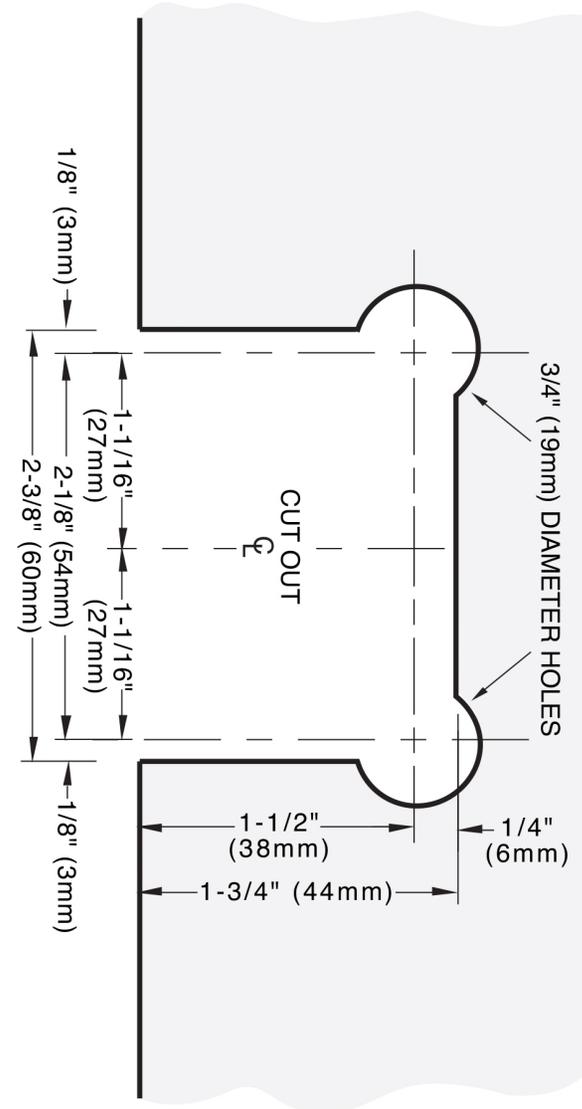

**CONCORD (FORMERLY LALIQUE)**

Wall Mount Hinge  
CAT NO. SDH037

For Technical Assistance in the United States and Canada 1.800.421.6144. Press 2, then option 1

C.R. Laurence Co., Inc. • 2503 E. Vernon Ave., Los Angeles, CA 90058 • 1.800.421.6144 • [crlaurence.com](http://crlaurence.com)