

















## DAISY MODEL PASS-THRU MODELS D1040, D1041, D1042, AND D1043



Counter by Others

# PARTS LIST

NOTE: Counter by Others

|                                                                                                                                                          |                                                                                                                                                          |                                                                                                                                                         |                                                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>D1040</b></p>  <p>Daisy with D4 Overhead Track and D606 Jambs</p> | <p><b>D1041</b></p>  <p>Daisy with D6 Overhead Track and D606 Jambs</p> | <p><b>D1042</b></p>  <p>Daisy with D4 Overhead Track and No Jambs</p> | <p><b>D1043</b></p>  <p>Daisy with D6 Overhead Track and No Jambs</p>    |
| <p><b>D4</b></p>  <p>Open Back Double Overhead Track</p>                | <p><b>D6</b></p>  <p>Enclosed Double Overhead Track</p>                 | <p><b>D35</b></p>  <p>Retractable Tip Lower Guide</p>                  | <p><b>D40</b></p>  <p>Hanger Clerk Side</p>                              |
| <p><b>D41</b></p>  <p>Hanger Customer Side</p>                        | <p><b>D52</b></p>  <p>Spring Loaded Catch</p>                         | <p><b>D606</b></p>  <p>Single Jamb with Cushion</p>                  | <p><b>D623</b></p>  <p>Single Channel Stile</p>                        |
| <p><b>D639</b></p>  <p>Vertical Stile Pull</p>                        | <p><b>D679</b></p>  <p>Nylon Ball Bearing Roller</p>                  | <p><b>D1611</b></p>  <p>H-Bar with Plastic Liner</p>                | <p><b>D1623</b></p>  <p>Overlap Stile with Pile and Gasket</p>         |
| <p><b>D658WS</b></p>  <p>Lower Frame Corner with Nylok Screws</p>     | <p><b>D662WS</b></p>  <p>Upper Frame Corner with Nylok Screws</p>     | <p><b>Optional Keyed Lock</b></p>  <p>Optional Keyed Lock</p>       | <p>Not Included :<br/>Fasteners for<br/>Perimeter Frame and Catch</p>  |

# ORDER OF ASSEMBLY AND INSTALLATION

|                                                           |       |
|-----------------------------------------------------------|-------|
| PARTS LIST .....                                          | 2     |
| SPECIFICATIONS .....                                      | 3     |
| GLASS FABRICATION .....                                   | 4     |
| GLASS PREPARATION .....                                   | 4     |
| SLIDING WINDOWS ASSEMBLY .....                            | 5 - 6 |
| Fit Top Rail on Glass and Loosely Attach Side Rails ..... | 5     |
| Loosely Attach Bottom Rail to Side Rails .....            | 5     |
| Square Frames and Secure .....                            | 6     |
| Replace Gasket in outer edge of D1623 .....               | 6     |
| INSTALLATION .....                                        | 7 - 9 |
| Install Overhead Track .....                              | 7     |
| Hang Windows .....                                        | 7     |
| Install Retractable Guides .....                          | 8     |
| Install Optional Jambs .....                              | 8     |
| Install D52 Catch .....                                   | 9     |
| OPTIONAL KEYED LOCK OPERATION .....                       | 10    |

**IMPORTANT: READ THIS MANUAL THOROUGHLY BEFORE BEGINNING INSTALLATION.**



Skip to page 7 for installation of stock D1041:  
36" W X 48" H frame size and 48" W X 48" H frame size

Contact the CRL Transaction Hardware Department at (800) 421-6144 EXT. 17760  
or email [transaction@crlaurence.com](mailto:transaction@crlaurence.com) for questions.

## SPECIFICATIONS

Model D1041 is shown in these instructions.

NOTE: Models D1041 and D1043 are designed for pass-thru applications and Models D1040 and D1042 are designed for showcase applications.

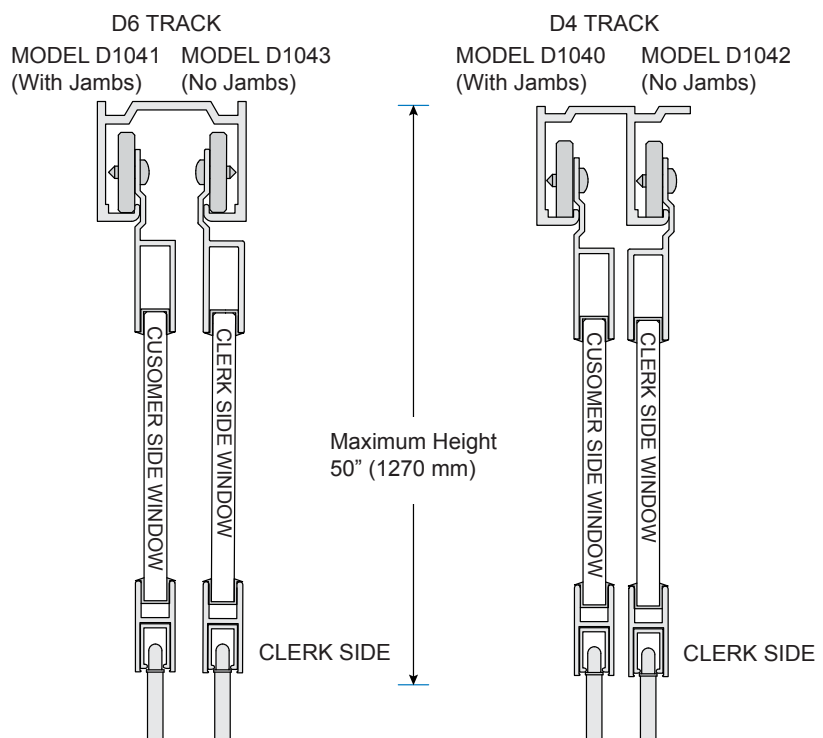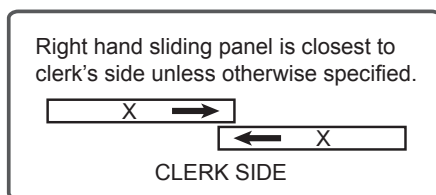

# GLASS FABRICATION

## Models D1040 and D1041 with Jambs:

Glass Width = Window Width divided by 2 minus 1-5/16" (33 mm)

Glass Height = Window Height minus 3-1/4" (83 mm)

## Models D1042 and D1043 without Jambs:




Glass Width = Window Width divided by 2 minus 1-1/16" (29 mm)

Glass Height = Window Height minus 3-1/4" (83 mm)


# GLASS PREPARATION

## Install Gasket on Glass



- Ⓐ Fit gasket onto glass at center of the side that will become the top. Smooth to corner and cut a slit through the base of gasket. Do Not cut all the way through to dust lip rims.

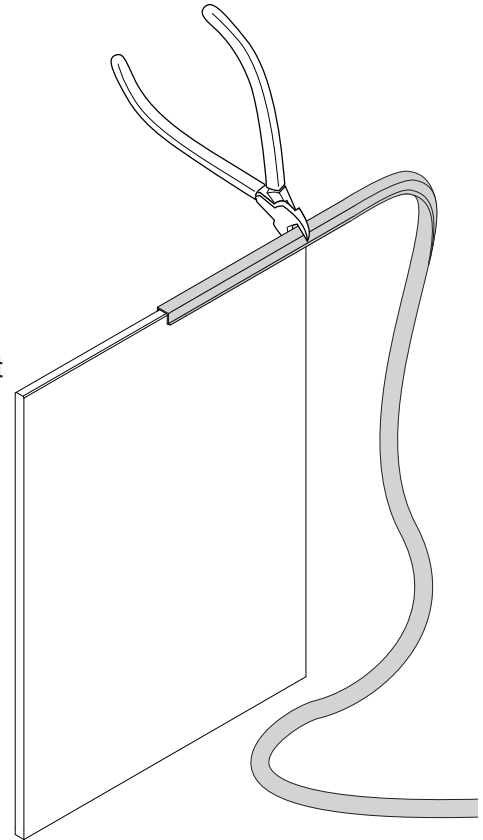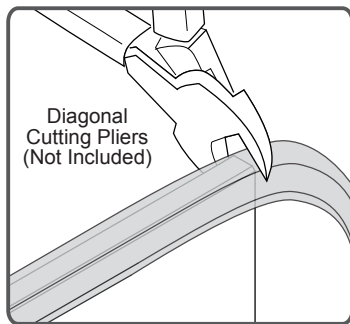

- Ⓑ Continue working gasket around edges, smoothing along each side and cutting at corner.

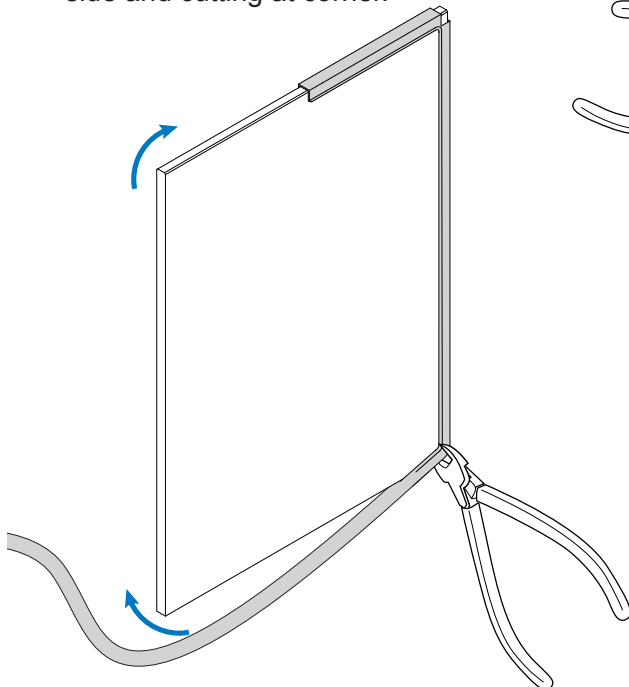


- Ⓒ Overlap ends at top and cut 1/8" (3 mm) excess. Butt ends together. Mark center of each panel.

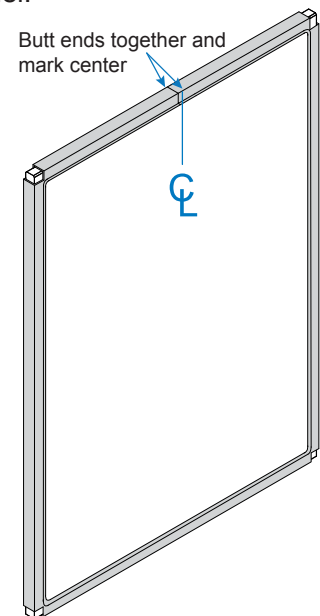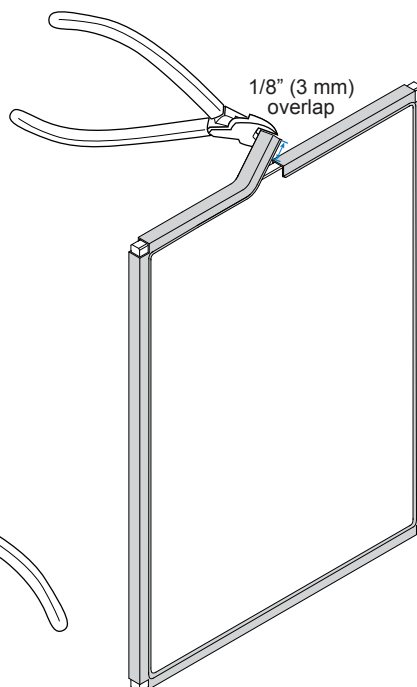


# SLIDING WINDOWS ASSEMBLY

## 1. Fit Top Rail on Glass and Loosely Attach Side Rails



Match center marks on top rail and glass.

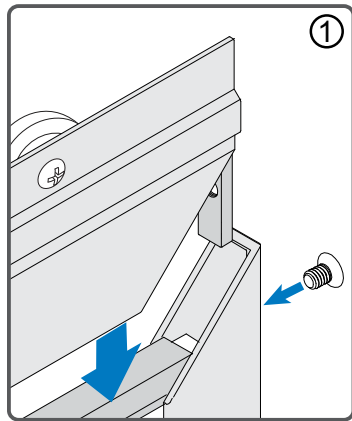

NOTE: Match the color-coded dots on the corners of the rails.

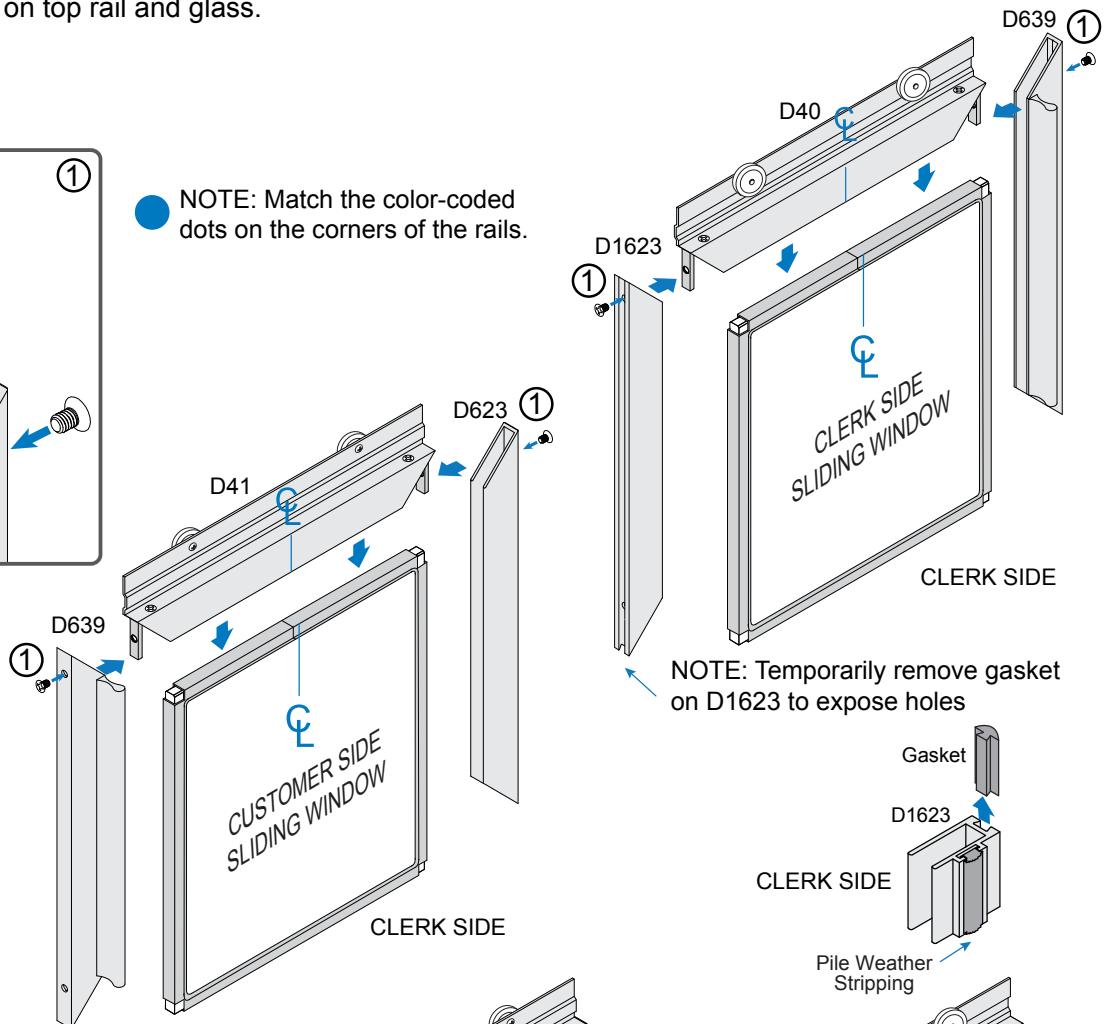

## 2. Loosely Attach Bottom Rail to Side Rails

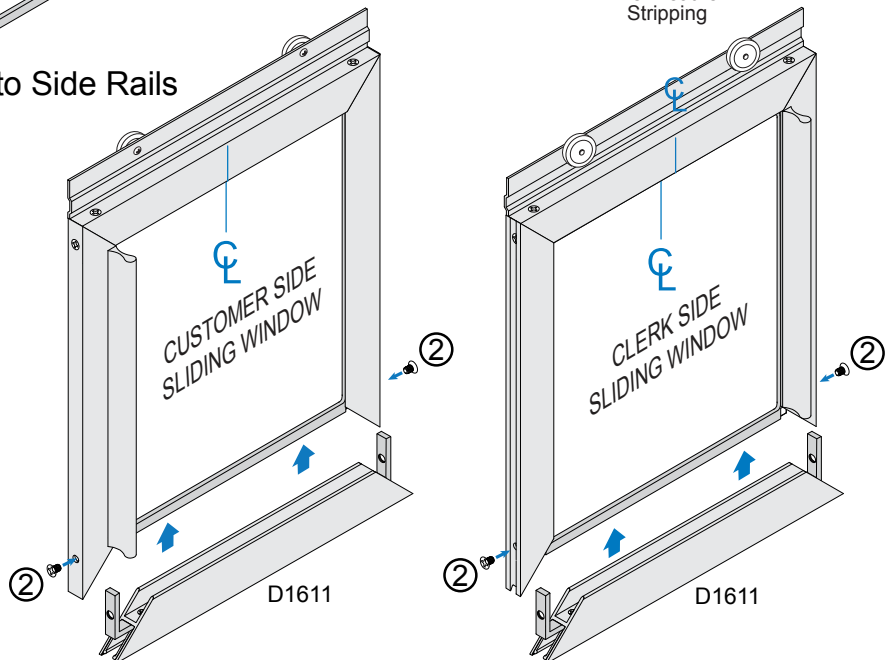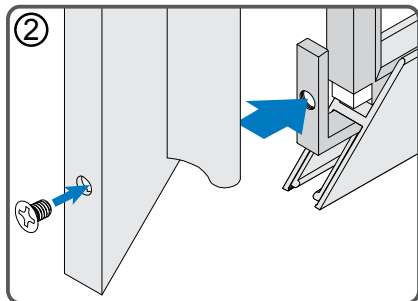


NOTE: Assemble one of each of the sliding windows shown.

## SLIDING WINDOWS ASSEMBLY (CONTINUED)

### 3. Square Frames and Secure

**IMPORTANT:** Tighten each corner a little at a time in rotating sequence, maintaining square condition.

**Do Not completely tighten any corner until all of the other three corners are almost completely tightened.**

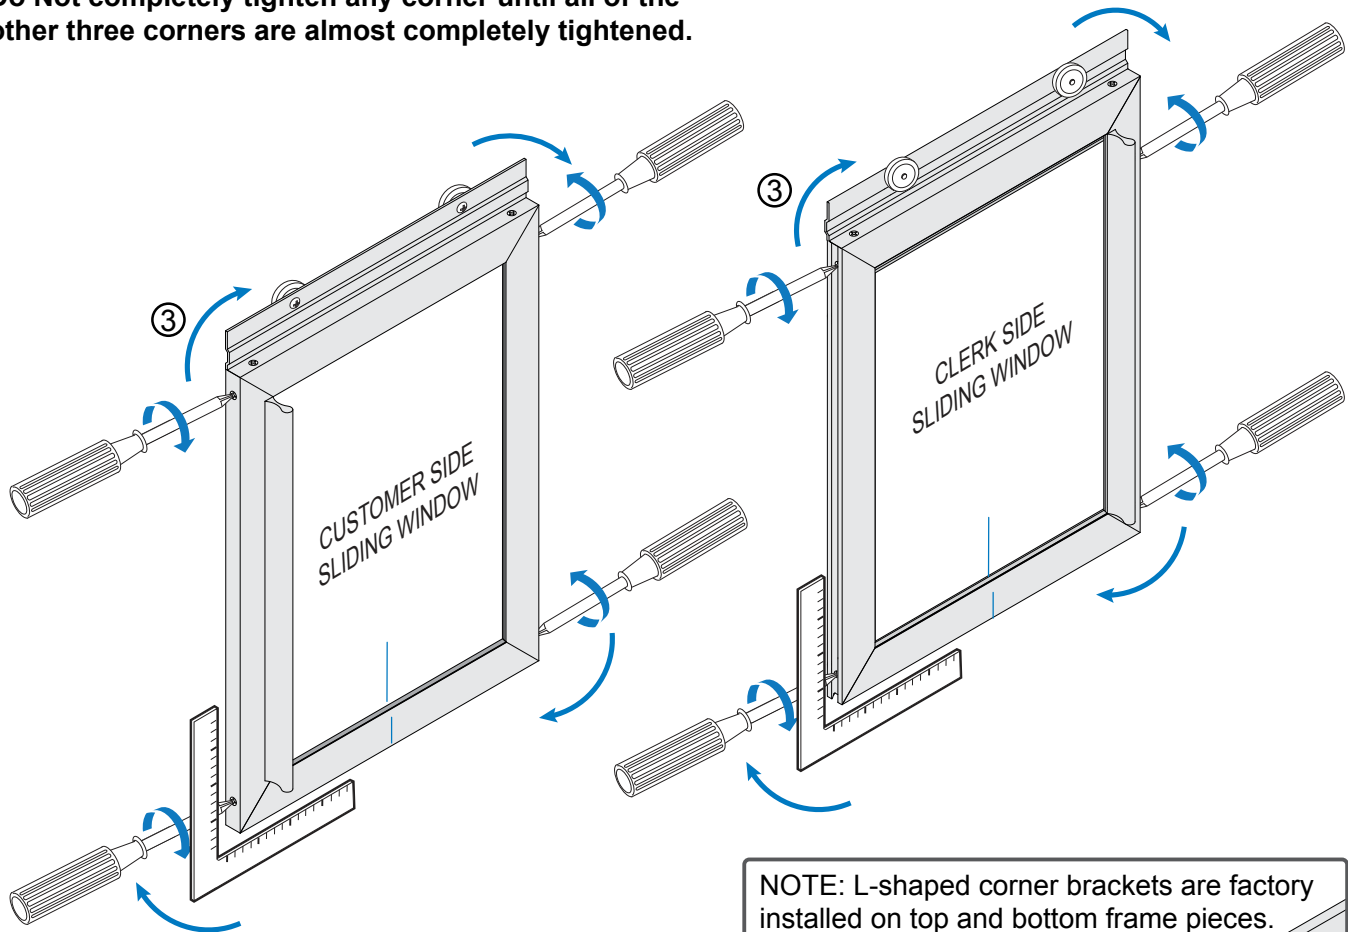


**NOTE:** L-shaped corner brackets are factory installed on top and bottom frame pieces.

Screw head is in glass pocket on bottom frame.

Corner Bracket

D1611  
Bottom Frame

### 4. Replace Gasket in outer edge of D1623

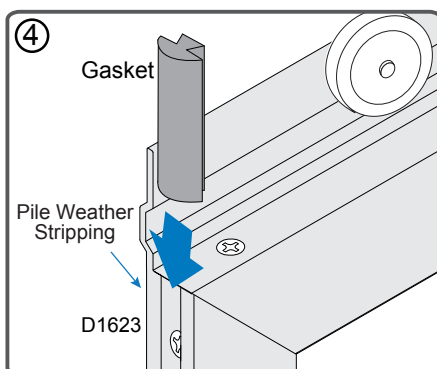


# INSTALLATION

## 1. Install Overhead Track


Use a level and shims to install overhead track correctly in opening.

NOTE: Use fasteners appropriate for the surrounding substrate. Fasteners are not included in kit.

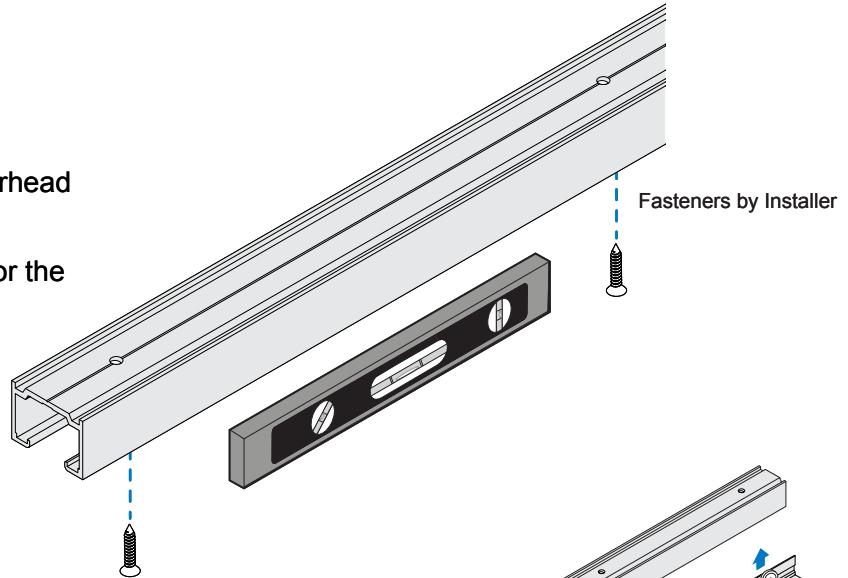


## 2. Hang Windows

NOTE: Check proper placement of Customer and Clerk Side Windows.


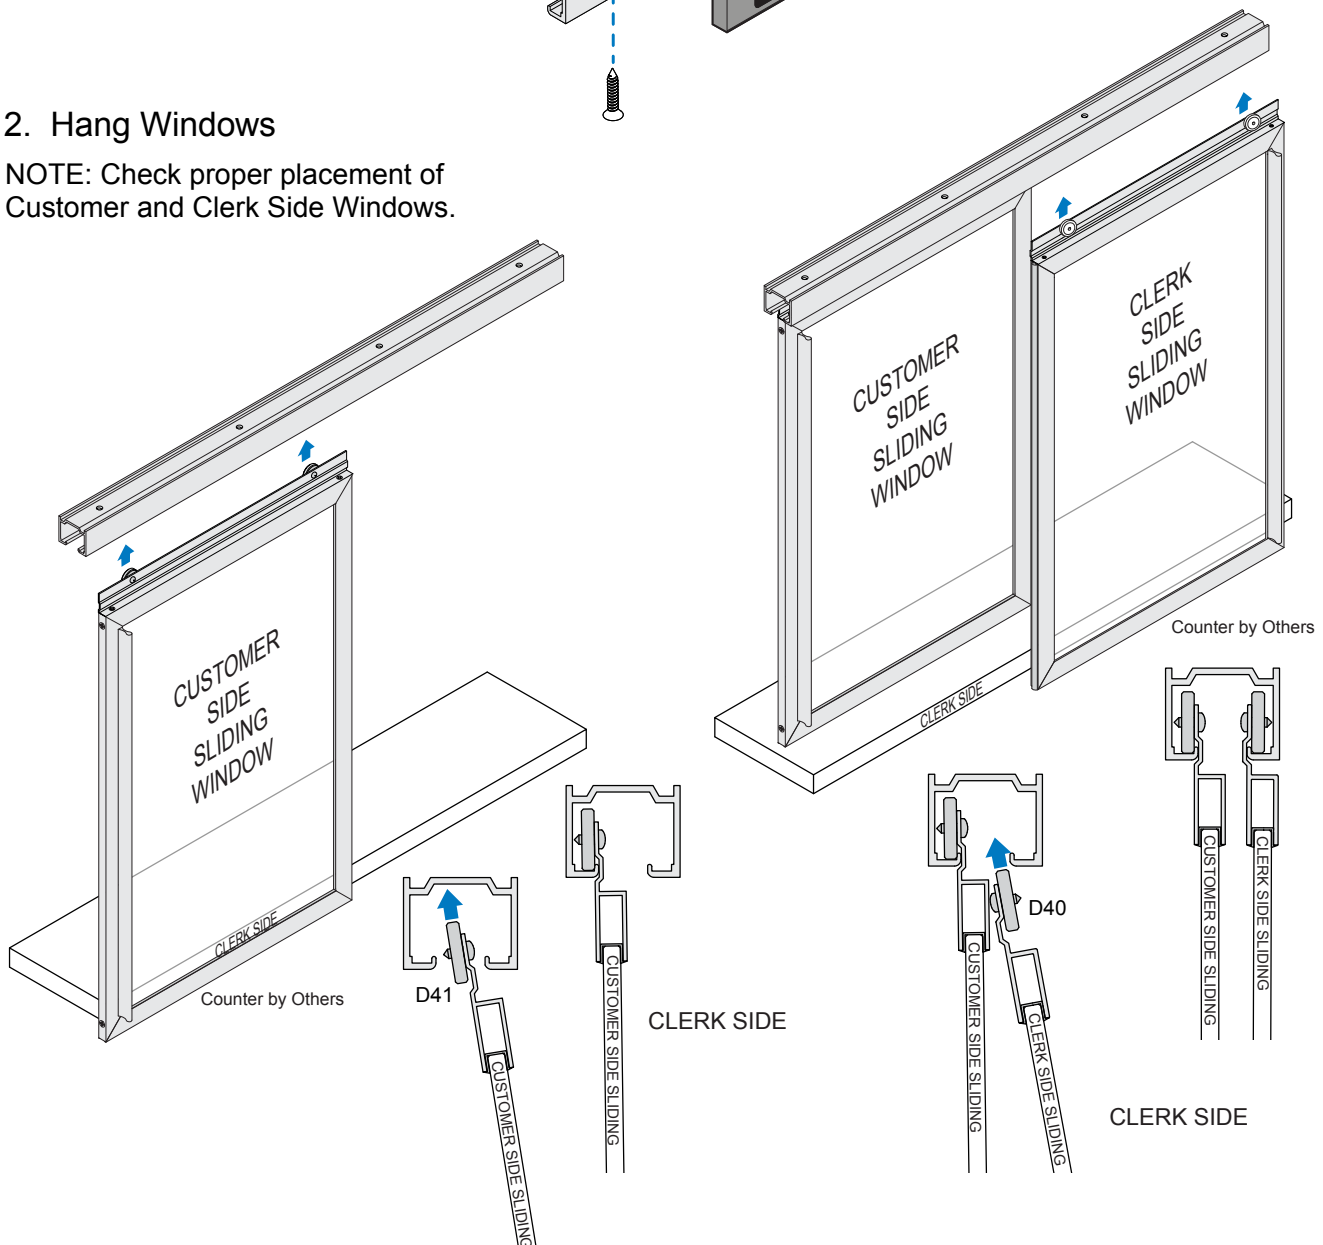


## INSTALLATION (CONTINUED)




With the windows in closed position, mark placement for retractable guides. Move the windows to the open position to mark placement for the jambs (for Models D1040 and D1041). Remove the sliding windows before installing retractable guides and jambs.

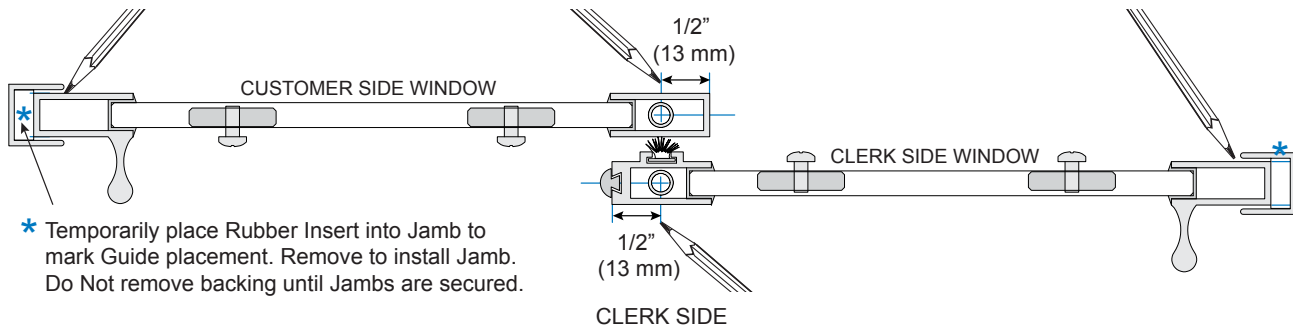

### 3. Install Retractable Guides




### 4. Install Optional Jambs

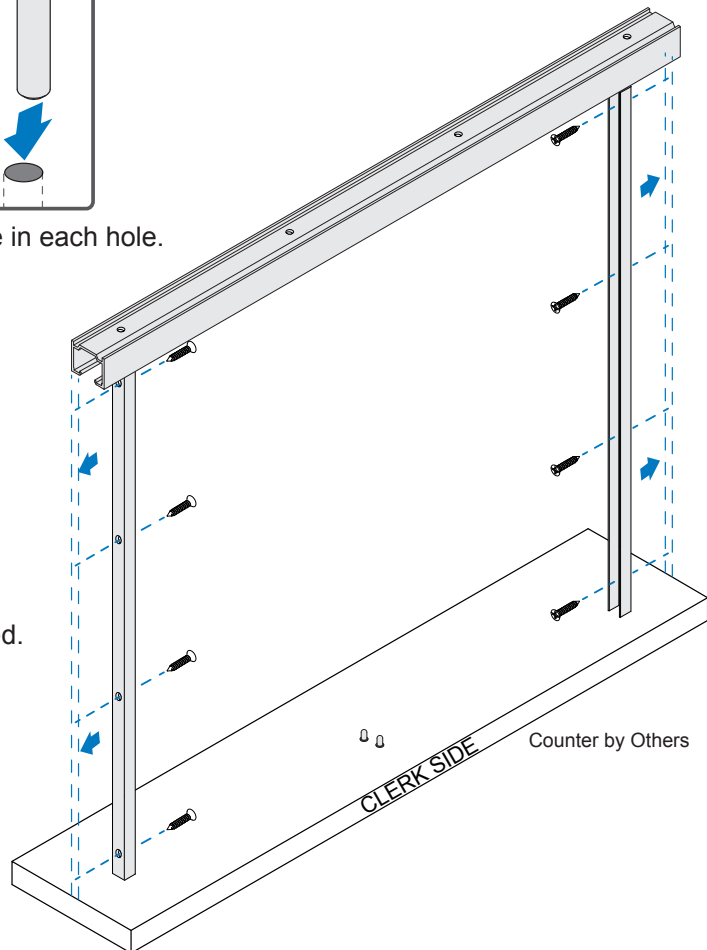


# INSTALLATION (CONTINUED)


## 5. Install D52 Catch

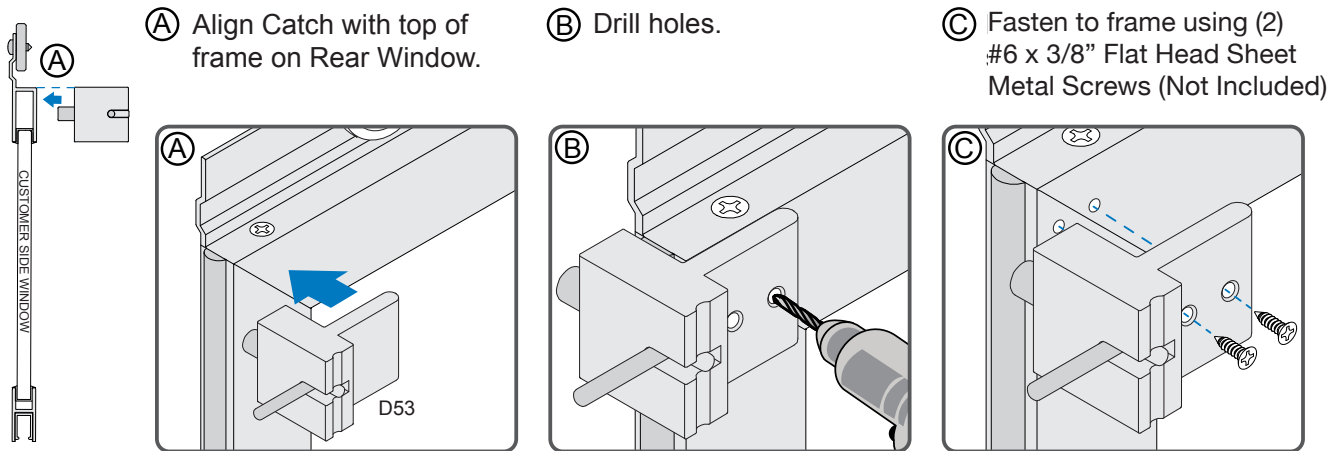

(D) Reinstall windows. Close windows to mark plunger hole location to be drilled in Customer Side Window.

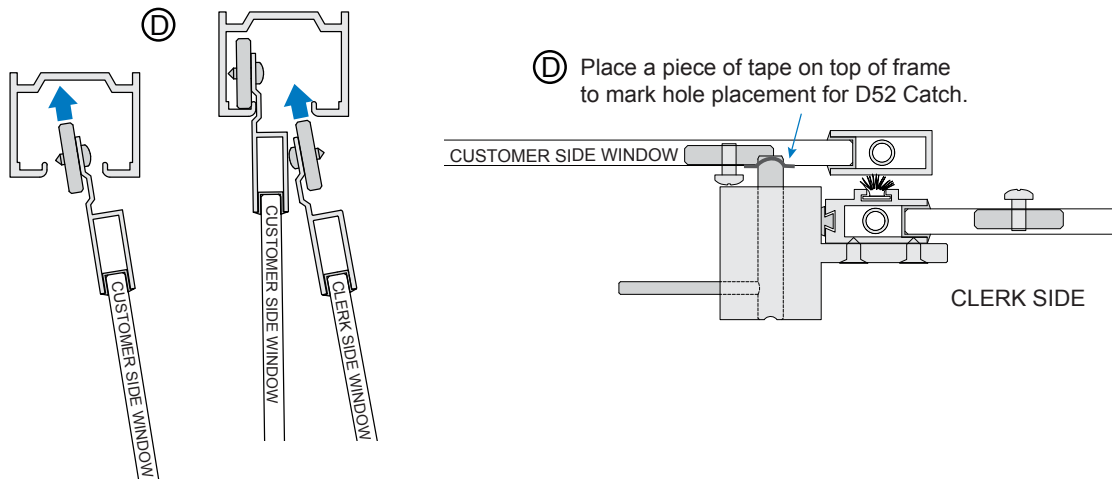


(E) Remove Customer Side Window to drill 9/32" (7 mm) hole, and then reinstall.

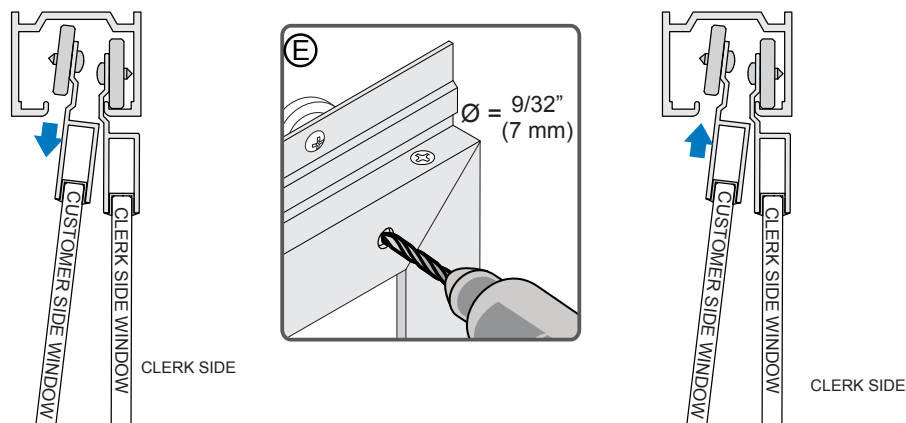


## OPTIONAL KEYED LOCK OPERATION


- Ⓐ Insert Key into Lock Cylinder and turn to unlock.

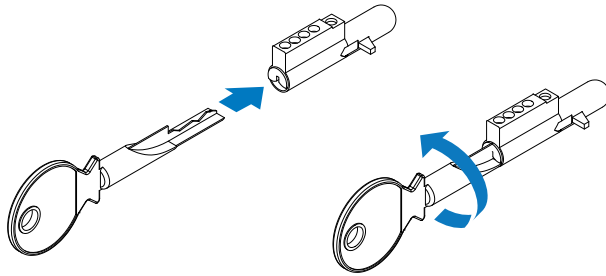


- Ⓑ Align sliding frame and jamb.

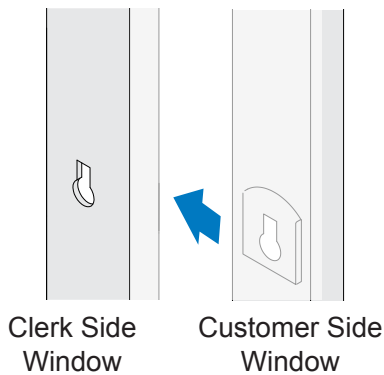

- Ⓒ Insert Key and Cylinder.

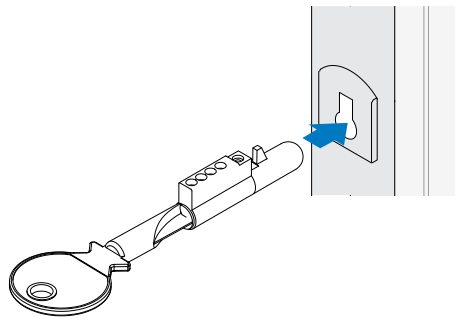

- Ⓓ Turn to locked position.



- Ⓔ Remove Key.

