




C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

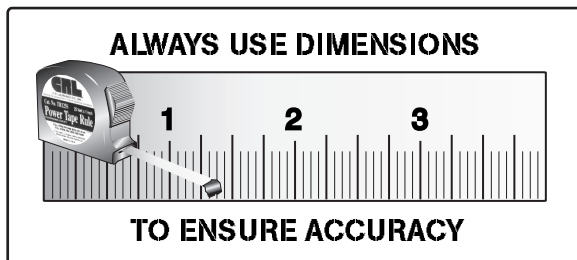

NOTE:


The minimum clearance between the door glass and the wall/panel is 1/8" (3mm) and the maximum clearance is 1/2" (12mm). The standard recommended clearance is 3/16" (5mm).

GLASS DOOR LOCK WITH INDICATOR AND GLASS DOOR LOCK RECEIVER

CAT No. P190SCB AND P190SCA

C.R. Laurence Co., Inc.
crlaurence.com

For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144; Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7740. Toll free fax (800) 458-7496.

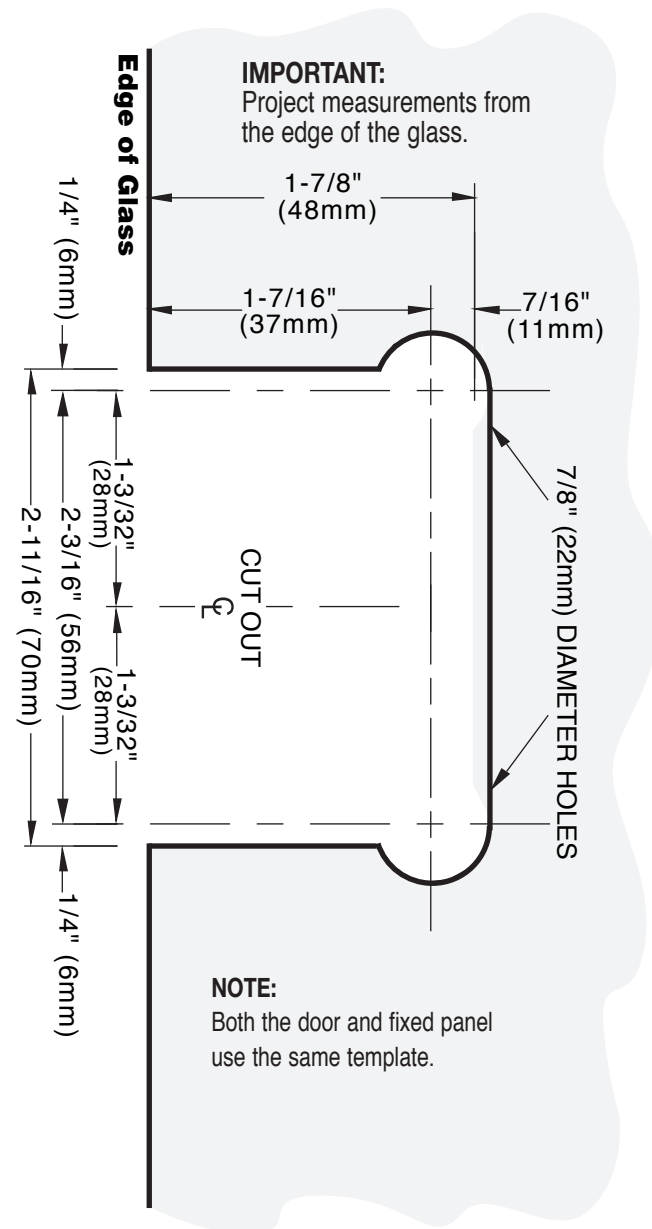

4Y-39C

© Copyright 2009, C.R. Laurence Co., Inc._SDT21_U5