




C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

GLASS CLAMPS

90° Glass Clamp
 (Wall-to-Glass Application)

CAT. No. GCB90
CAT. No. GCB690

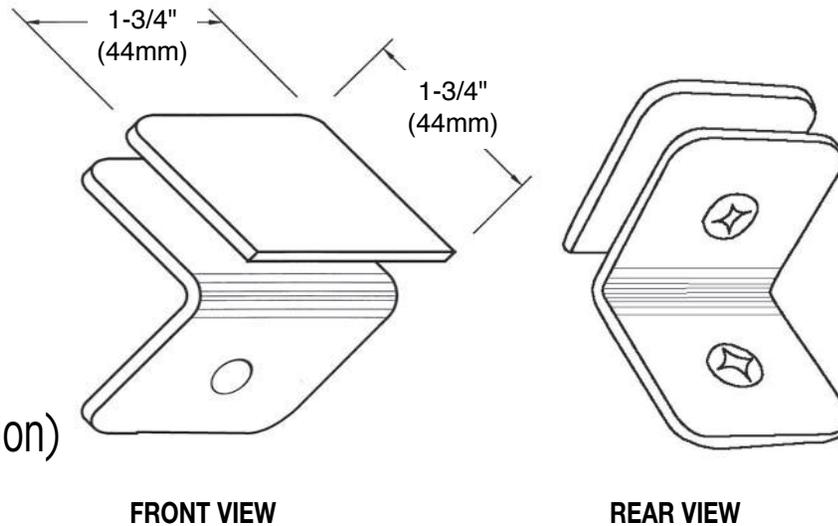

FRONT VIEW

REAR VIEW

Note: The Clamps shown on this page can also be used in a glass-to-glass application. For information on this see pages 4X-5 and 4X-6.

Specifications:

Material: Solid brass

Glass Thickness Range:

GCB90 = 5/16" (8mm) to 1/2" (12mm)

GCB690 = 1/4" (6mm)

Hole Size Required: 5/8" (16mm) or 3/4" (19mm)

Includes: Mounting screws and gaskets


Note: An additional set of gaskets is required for 5/16" (8mm) glass

Template Shown on Next Page

GLASS CLAMPS

90° Square Glass Clamp
 (Wall-to-Glass Application)

CAT. No. SGC0F90

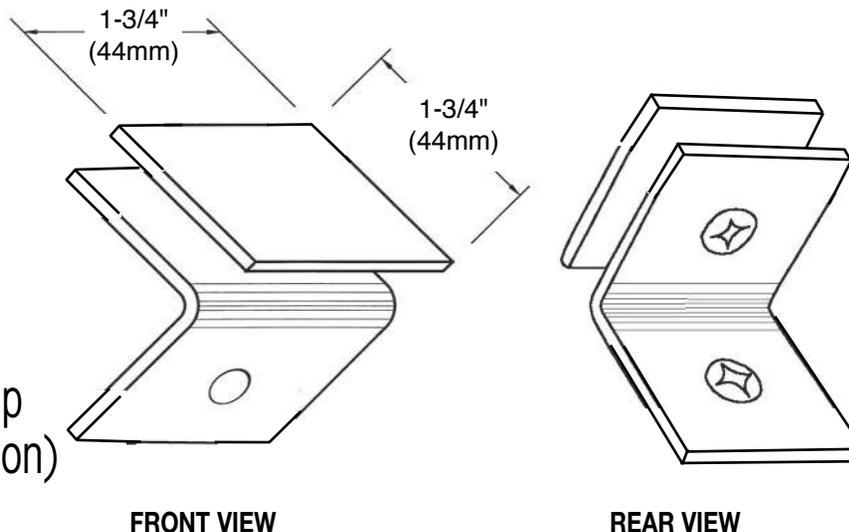

FRONT VIEW

REAR VIEW

Specifications:

Material: Solid brass

Glass Thickness: 3/8" (10mm) and 1/2" (12mm)

Hole Size Required: 5/8" (16mm) or 3/4" (19mm)


Includes: Mounting screws and gaskets

Template Shown on Next Page

4X-7

TYPICAL INSTALLATION

To use for glass-to-wall, remove one of the outer plates, and attach to the wall with enclosed wood screw.

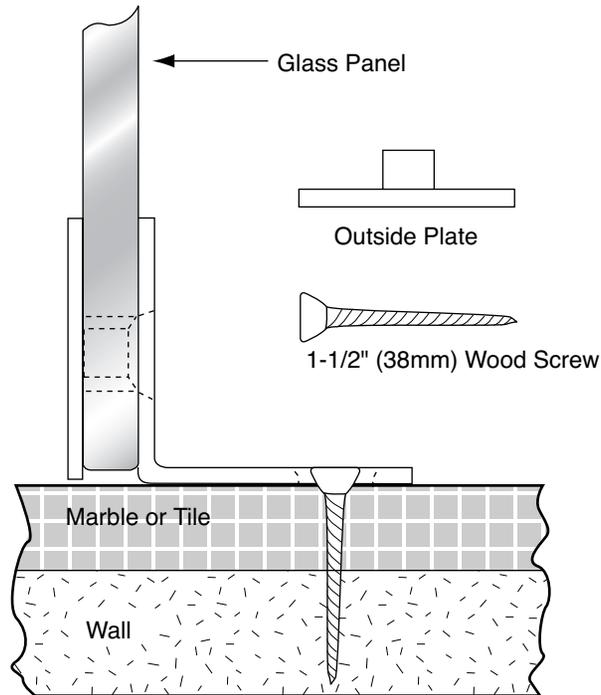

GLASS CLAMPS

THE TEMPLATE ON THIS PAGE APPLIES TO THE FOLLOWING CLAMPS:

90° Glass Clamp (Wall-to-Glass Application)

CAT. No. GCB90

Junior 90° Glass Clamp (Wall-to-Glass Application)

CAT. No. GC690

90° Square Glass Clamp (Wall-to-Glass Application)


CAT. No. SGC0F90

C.R. Laurence Co., Inc. For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144;
crlaurence.com Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7740. Toll free fax (800) 458-7496.


Note: The Clamps shown on this page can also be used in a glass-to-glass application. For information on this see pages 4X-5 and 4X-6.

TEMPLATE

Important: Project measurements from the edge of the glass.

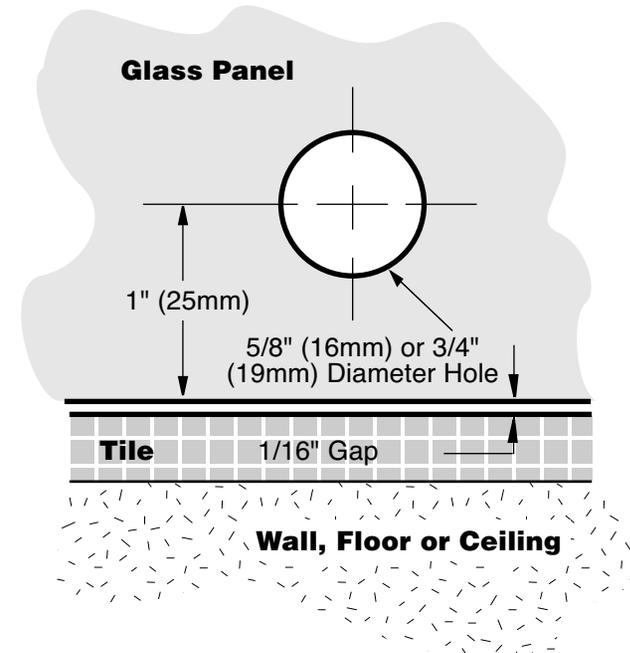

ALWAYS USE DIMENSIONS

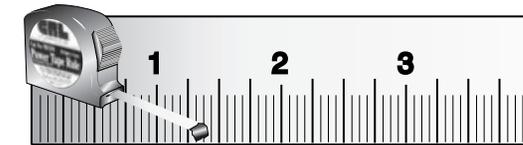

TO ENSURE ACCURACY