

CRL SERIES 900 ANGLE FRAMED MIRROR WITH FLOAT PLATE GLASS

DESCRIPTION

Series 900 Angle Framed Mirror comes with a #4 satin finish stainless steel frame for years of use and is supplied with an internal locking system ideal for institutional and commercial installations. Mounting bracket secures directly to wall and is hidden after installation. Series 900 Mirror complies with Federal Specification DD-M00411B, Style E, Grade 1.

TECHNICAL DATA

Mirror: 5mm thick float plate glass, electro-copper backed to prevent silver spoilage.
Backing: Full-sized expanded polystyrene sheet.
Back Plates: 22 gauge galvanized steel with punched key slots.
Wall Bracket: 22 gauge galvanized steel with shoulder rivets.
Lock Springs: 24 gauge galvanized steel.
Frame: 3/4" x 3/4" x 3/8" 18 gauge type 304 stainless steel with #4 satin finish and welded corners.

NOTES




1. Mirror sizes indicates nominal glass size. Actual finished mirror sizes are 7/8" larger.
2. Always order mirror by width first, then height.

INSTALLATION

1. Attach mounting bracket to wall using mechanical fasteners appropriate for existing wall conditions.
2. Place mirror face down on flat surface and slide snap-lock springs under the neck of the key slots on the bottom channel (see 1,2 & 3 below).
3. Mount mirror on wall bracket making sure shoulder rivets are fully seated in the neck portion of the key slots (see4).

GUARANTEE

900 Series Angle Framed Mirror is guaranteed for ten years against silver spoilage with proper maintenance.

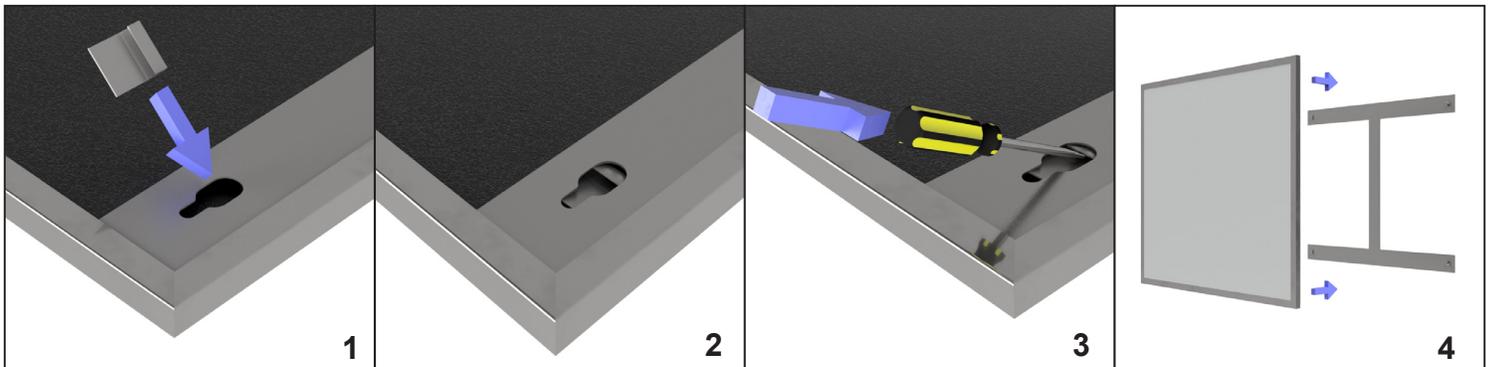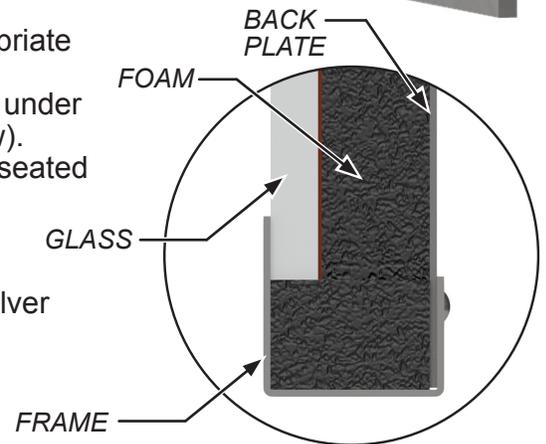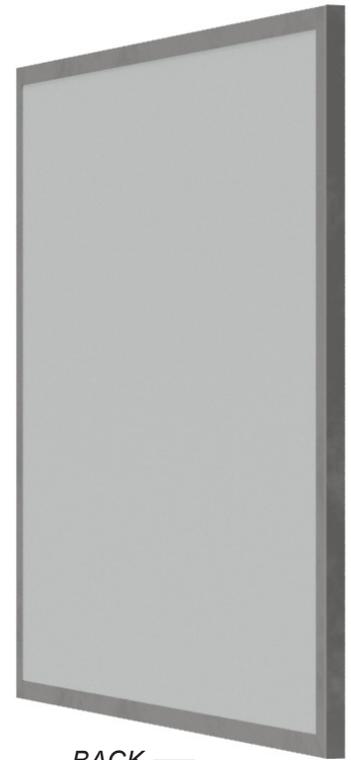

Phone: (800) 421-6144 • Fax: (800) 587-7501
crlaurence.com • usalum.com • crl-arch.com