



FOR INTERIOR AND
EXTERIOR WITH LOW
WIND APPLICATION
USE ONLY

WOOD OR STEEL
STUDS BY OTHERS

USE APPROPRIATE
FASTENERS FOR
MOUNTING SUBSTRATE
SEE INSTALLATION
MANUAL FOR PROPER
FASTENING

NOTE: THE STANDARD PACKAGE CONSISTS OF:
THE AUTOMATIC OPERATOR, CONTROLLER, POWER SUPPLY, PUSH ARM, SPINDLE COVERS,
HOLD/AUTO/OFF SWITCH, SMART DEVICE OPERATION VIA APP (DEVICE BY OTHERS), DOOR STOP,
ELECTRONIC & MECHANICAL LOCK KICK.
SMART DEVICE DIAGNOSTICS & STATISTICS VIA APP (DEVICE BY OTHERS)
STANDARD FINISH: CLEAR OR DARK BRONZE

- OPTIONS:
- WAVE OR PRESS ACTIVATION PLATES (PLATES CAN BE CONCEALED INTO WALL OR SURFACE MOUNTED WITH WATER RESISTANT PLASTIC ENCLOSURE), CUT SHEET AA-194
 - ELECTRIC STRIKE TO RELEASE DOOR LATCH (IF EQUIPPED)
 - PLUG-IN POWER SUPPLY KIT, CUT SHEET AA-64
 - SEE SHEET OS-8 FOR ALL OTHER OPTIONS.

AUTOMATIC :-



ACTIVATE THE DOOR BY HANDICAPPED
WAVE/PRESS PLATE AND THE DOOR WILL SLOWLY
POWER OPEN, TIME OUT, AND SLOWLY
CLOSE.


PUSH ACTIVATION :- (OPTIONAL)



PUSH OR PULL THE DOOR AND IT WILL
SLOWLY POWER OPEN , TIME OUT, AND
SLOWLY CLOSE.

NOTE : OPERATIONAL ADJUSTMENTS TO BE IN
ACCORDANCE WITH ANSI/BHMA A156.19 STANDARD.
FOR LOW ENERGY POWER
OPERATED DOORS.

NOTE : WAVE/PRESS PLATE ACTIVATION TO BE LOCATED
WITHIN VIEW OF THE DOOR. REFERENCE ANSI A156.19
FOR FURTHER DETAILS.

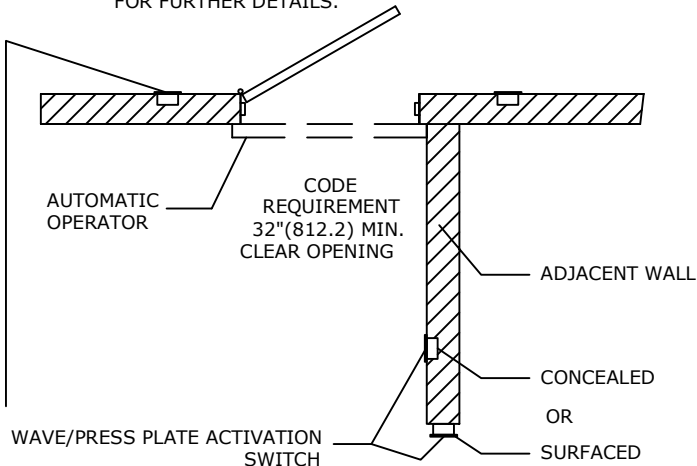

DWG NO. ACH-1570791					
DRN BY	SS	DATE	7/23/20	CHK BY	DATE
		REV.	2.0	DATE 8/13/24	

