

COMPANY NAME _____		PHONE _____
CONTACT _____	ACCOUNT NO. _____	FAX _____
JOB NAME _____		EMAIL _____

☐ QUOTE ☐ ORDER P.O. # _____ DATE _____

SERIES	THICKNESS	STANDARD PROFILE DIMENSIONS		
		STILE	TOP RAIL	BOTTOM RAIL
250 NARROW STILE	1-3/4"	2"	2-1/8"	3-3/16"
400 MEDIUM STILE	1-3/4"	3-1/2"	3-3/16"	6-1/2"
550 WIDE STILE	1-3/4"	5"	5-1/2"	6-1/2"

DOOR STILE

Standard Entrance
☐ 250 Narrow Stile
☐ 400 Medium Stile
☐ 550 Wide Stile

DOOR FINISH

☐ 11 - Clear Anodized Class I
☐ 22 - Dark Bronze / Black Anodized Class I
☐ 52 - Bone White 70% KYNAR® (2-Coat)
☐ 71 - Standard 70% KYNAR® (2-Coat)
 Standard Color per Chart - Specify _____

☐ 71 - Custom 70% KYNAR® (2-Coat) - Specify _____

☐ 71 - Custom 70%KYNAR®(3-Coat) - Specify _____

HARDWARE FINISH	DOOR FINISH
• Clear	11, 12, 52
• Bronze	22
☐ Specify	71

DOOR OPENING SIZE

☐ 36" x 84"
☐ Custom Single _____
 Door Tag # _____

☐ 72" x 84"
☐ Custom Pair _____
 Door Tag # _____

DOOR SWING	QTY
☐ LHR Hinge Left Swing Out	_____ ea.
☐ RHR Hinge Right Swing Out	_____ ea.
☐ LH Hinge Left Swing In	_____ ea.
☐ RH Hinge Right Swing In	_____ ea.
☐ LHD Hinge Left Double Acting	_____ ea.
☐ RHD Hinge Right Double Acting	_____ ea.
☐ PAIR Swing In	_____ ea.
☐ PAIR Swing Out	_____ ea.
☐ PAIR Double Acting	_____ ea.

TOP RAIL

☐ Standard
☐ 3-3/16" - Min for OHCC
☐ 5-1/2" - No OHCC

☐ 6-1/2"
☐ 9-1/2"
☐ Custom

BOTTOM RAIL

☐ Standard
☐ 3-3/16"
☐ 5-1/2"
☐ 6-1/2"

☐ 7-1/2"
☐ 9-1/2"
☐ Custom

DOOR HINGING

☐ Continuous Geared Hinge
☐ 1 Pair Butt Hinges
☐ Intermediate Butt Hinges for Doors Over 84"
 Add _____ per Door
☐ Top/Bottom Offset Pivots
☐ Intermediate Pivots for Doors Over 84"
 Add _____ per Door
☐ DH022 ☐ DH010
☐ Power Transfer
☐ Center Pivot (Double Acting)
☐ Custom ☐ By USALUM ☐ By Customer

☐ Prep and Supply ☐ Prep Only
☐ Blank (No Prep)

NOTE: Prep Only Requires Manufacturer's Name ,
 Model, and Template
 Manufacturer: _____
 Model: _____

CLEARANCES/ THRESHOLDS

Clearance From Bottom of Door to Finish Floor
☐ Custom Specify _____

Thresholds
☐ 4" Standard for Center Hung Doors
☐ 4-3/4" Standard for Offset Hung Doors
☐ Custom Specify _____
☐ By USALUM ☐ By Others

DOOR SWEEP

☐ Yes ☐ No
☐ Exposed Fasteners
☐ Concealed Fasteners

DOOR CLOSER

☐ O.H. Concealed (Double Acting-Prep Only)
☐ O.H. Concealed (Offset-Prep Only)
☐ 90° ☐ 105°
☐ Hold Open ☐ Yes ☐ No
☐ Surface Mount
☐ Drop Plate
☐ No Closer Required
☐ Custom ☐ By USALUM ☐ By Customer
☐ Prep and Supply ☐ Prep Only
☐ Concealed Top Rail Door Stop/Holder Degree
 * Requires Special Top Rail

NOTE: Prep Only Requires Manufacturer's Name ,
 Model, and Template
 Manufacturer: _____
 Model: _____

LOCKING OPTIONS

☐ MS Hookbolt With Two Cylinders - **STD**
☐ Long Throw Deadlock With Cylinders
☐ 3-Point Locking @ Pair With Cylinders
☐ Latch/Deadlock (DH189) With Cylinders
☐ Thumbturn in Lieu of Cylinder
☐ Latchlock (DH002)
☐ Cylinder (Ext.) ☐ Thumbturn (Int.)
☐ Lock Indicator
☐ Cylinder Guard
☐ Flushbolts
☐ Paddle Handle
☐ Lever Handle ☐ DH569
☐ CRL Lever Handle ☐ DL2150
☐ Electric Strike
☐ Custom ☐ By USALUM ☐ By Customer

☐ Prep and Supply ☐ Prep Only
☐ Blank (No Prep)

NOTE: Prep Only Requires Manufacturer's Name ,
 Model, and Template
 Manufacturer: _____
 Model: _____

CONCRETE SWEEP

☐ Top Rail
☐ Bottom Rail

FOR OFFICE USE ONLY

TAKEN BY: _____
 PRICED BY: _____
 EDITED BY: _____

PANIC DEVICES

- Concealed Vertical Rod Panics
☐ Jackson 1285
☐ Jackson 2086
☐ Jackson 1085
☐ Adams-Rite 8600
☐ With Cylinder on Active Leaf
☐ Exit Only
☐ With Cylinders on Pair (Both Leaf's)

- Rim Panics
☐ Jackson 1295
☐ Jackson 2095
☐ Jackson 1095
☐ Adams-Rite 8800
☐ With Cylinder on Active Leaf
☐ Exit Only
☐ Removable Mullion (For Pair of Doors)
☐ With Cylinders on Pair (Both Leaf's)

- Mortise Panics
☐ Adams-Rite 8400
☐ CRL-Blumcraft Panic
☐ Custom ☐ By USALUM ☐ By Customer
☐ Prep and Supply ☐ Prep Only

NOTE: Prep Only Requires Manufacturer's Name ,
Model, and Template

Manufacturer: _____

Model: _____

FRAME SYSTEM

- Series 400** 1-3/4" x 4"
Series 450 1-3/4" x 4-1/2"
Series 451 2" x 4-1/2"
Flush Front 4-1/2"
Flush Front 6"
Subframe

- ☐ Tubular
☐ Tubular
☐ Tubular
☐ FF450
☐ FF600
☐ 1" x 4-1/2"
☐ Open Back
☐ Open Back
☐ Open Back
☐ FF451
☐ FF601

☐ Custom: Specify _____

FRAME TYPE

- ☐ Up and Over (No Transom)
☐ 126" (3.2 m) High With Transom
☐ Frame Only
☐ Door Only (No Frame)
☐ Custom

PUSH/PULL HARDWARE

- ☐ Standard Push Bars
☐ Standard Push/Pull
☐ Offset Pulls
☐ None
☐ Custom ☐ By USALUM ☐ By Customer


- ☐ Prep and Supply ☐ Prep Only

NOTE: Prep Only Requires Manufacturer's Name ,
Model, and Template

Manufacturer: _____


Model: _____

DOOR SWING CHART

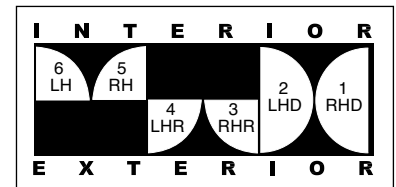


Use the Door Swing Chart to determine
how the door(s) should be handed.

**PUSH / PULL
& CYLINDER**

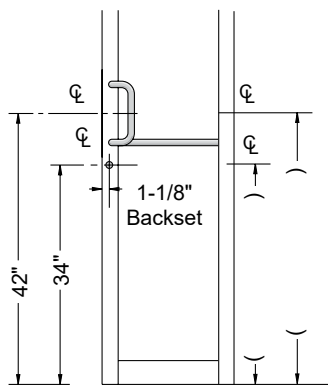


A Standard Location
B Special Location (Specify)

**1285
CONCEALED VERTICAL
ROD PANIC**

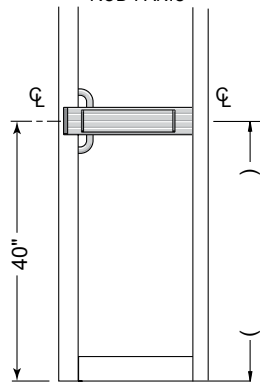


A Standard Location
B Special Location (Specify)

**1295
RIM PANIC**

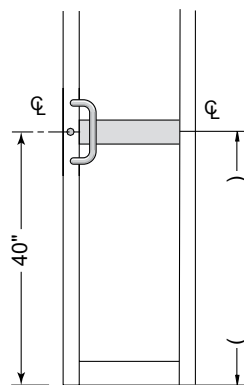

A Standard Location
B Special Location (Specify)

**DH009
BUTT HINGES**

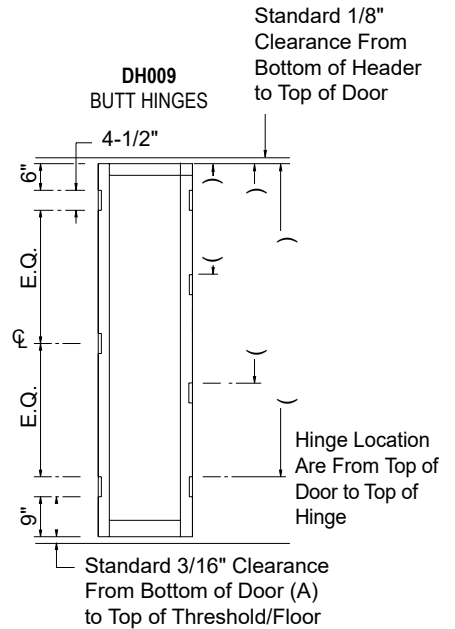

APPROVED _____ DATE _____

NOTE: PLEASE DOWNLOAD FORM TO SUBMIT. DO NOT FILL FORM ONLINE.

Email completed form to us_alum@usalum.com.
 Fax checklist to U.S. Aluminum Technical Sales at (877) 883-7547
 To review call (800) 627-6440. This form is available online at usalum.com.

FOR OFFICE USE ONLY

TAKEN BY: _____

PRICED BY: _____

EDITED BY: _____

VISION LITE GLASS STOP

☐ With 1/4" Square Glass Stops

☐ With 1/4" Bevel Glass Stops

☐ With 1" Glass Stops

☐ Other _____

LOWER HALF PANEL MUNTIN OPTIONS




☐ 5/8"	☐ 5"	☐ 7-1/2"
☐ 2"	☐ 6-3/16"	☐ 9-1/2"
☐ 4-1/8"	☐ 6-1/2"	☐ Custom

* Dimensions do not include stops.



DIMENSIONS	ACTIVE DOOR	INACTIVE DOOR
D1		
D2		
D3		
D4		

NOTE: For Painted Doors Consult Factory Prior to Application

FLUSH PANEL CONFIGURATIONS

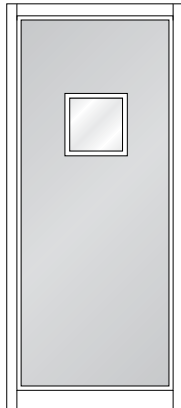
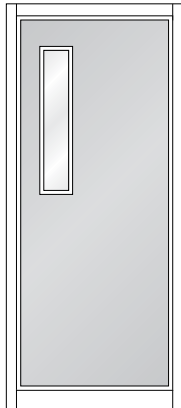
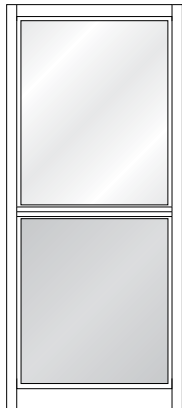
			
☐ Blank	☐ 12" x 12" View Lite	☐ Narrow Lite	☐ Lower Half Panel

CUSTOM (PLEASE SKETCH)

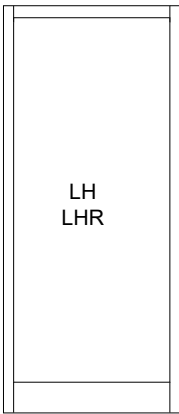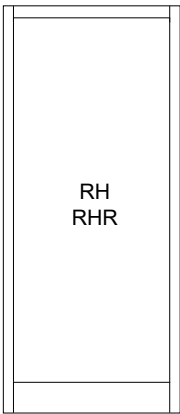
	
LH LHR	RH RHR

APPROVED _____

DATE _____

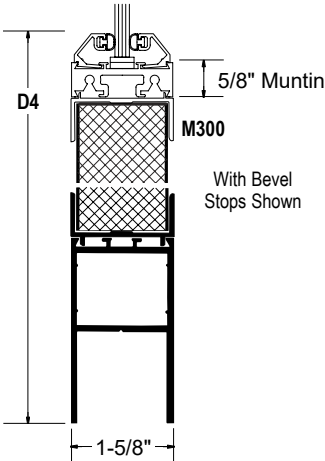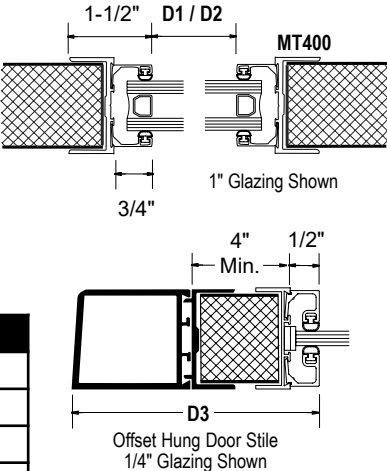

FLUSH PANEL WITH VISION LITE DIMENSIONS

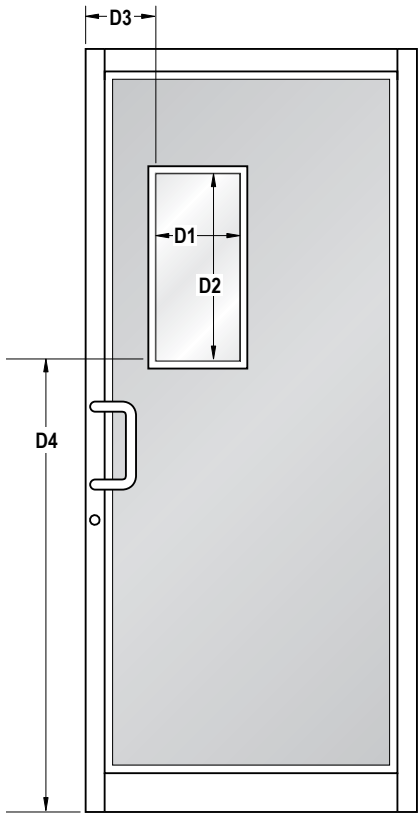

Series 1000 Flush Panel
250 Narrow Stile
Offset Hung (Exterior View)

FOR OFFICE USE ONLY

TAKEN BY: _____

PRICED BY: _____

EDITED BY: _____