




C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

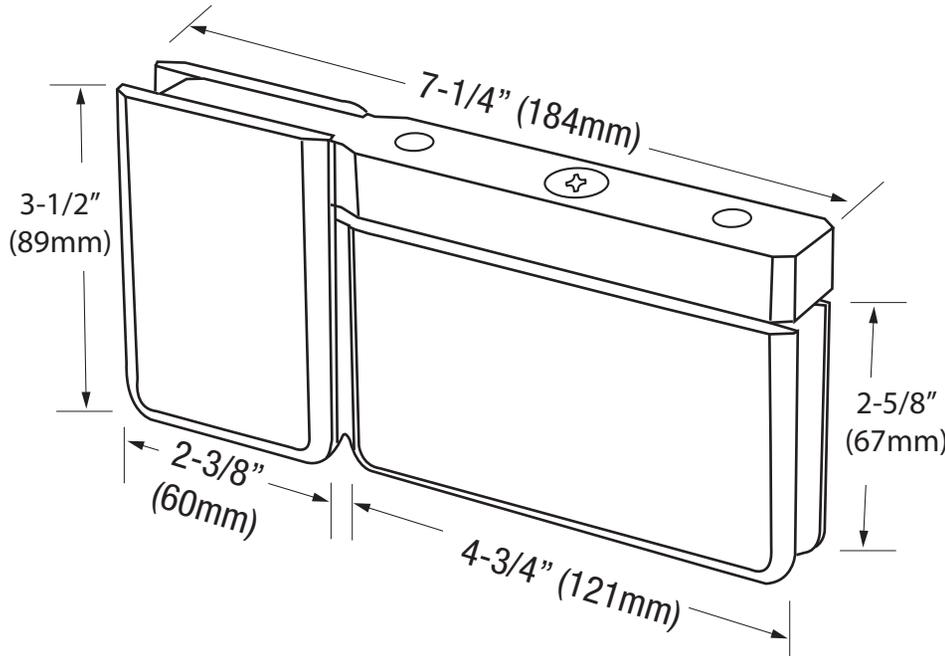

SENIOR PRIMA

Hinge with U-Clamp

CAT. No. SRPPH07

Edge Mount Preferred Method	Page 4H-8F
Top Flush Mount Method	Page 4H-8H
Bottom Mount Method	Page 4H-8I

*Maximum Door Capacities	1/2" (12mm) Glass	
	Weight	Width
Using 2 Hinges	117 lbs.(53 kg)	31"(787mm)

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

Important Information:

Do Not Fabricate Glass Prior to Qualifying for Design and Installation Criteria Shown on Page 4H-8G

See template options at lower left of page.

SRPPH07 is hinged both left and right. To change the handing of the hinge, remove the clamp portion and reverse.

Specifications:

Door Glass Size: 1/2" (12mm) thick tempered safety glass

Construction: Solid brass

Closing Type: Self-centering when within 15° of closed position

Cutout Required in Door, Hole Required in Fixed Panel

Includes: Gaskets, screws and template

Use of Gaskets:

For 1/2" Door Glass: Use one thick gasket and one thin gasket on each side

For 12mm Door Glass: Use one thick gasket on each side

Recommendations:

For public safety, we only recommend the use of tempered safety glass.

Do not use power tools when installing these hinges.

Maintenance Guidelines:



- Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as Ivory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.



Important Information:

Do Not Fabricate Glass Prior to Qualifying for Design and Installation Criteria Shown on Page 4H-8G

TYPICAL INSTALLATION

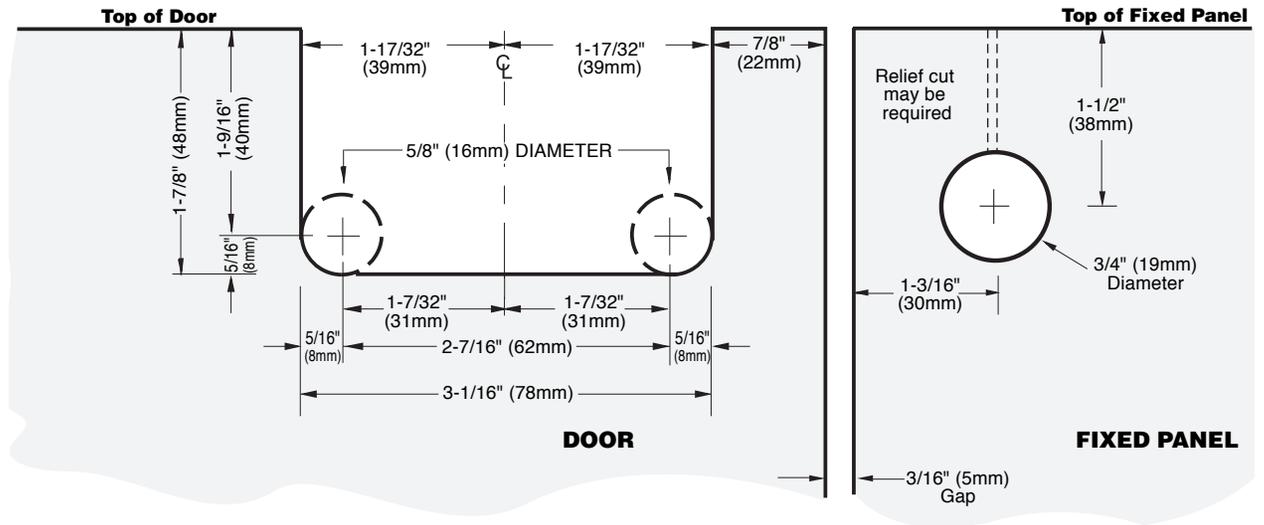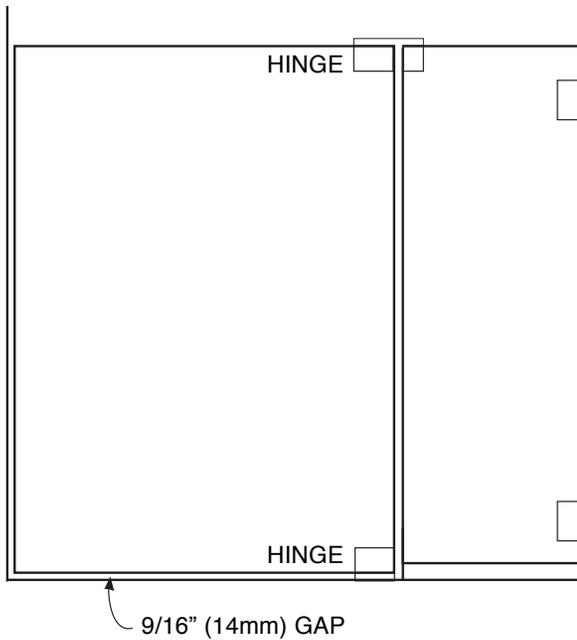


SENIOR PRIMA

Hinge with U-Clamp

CAT. No. SRPPH07

Edge Mount Preferred Method

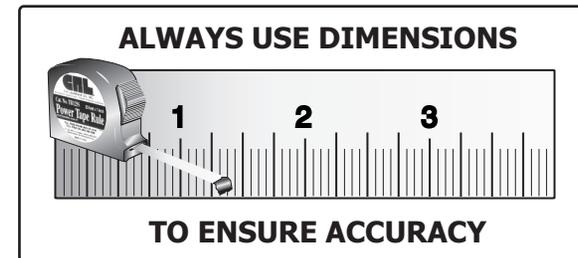




Senior Prima Series Top or Bottom Mount Pivot Hinge With Attached U-Clamp For 1/2" (12 mm) Thick Tempered Door Glass

Design and Installation Criteria:


- Door Glass Must be 1/2" (12 mm) Thick
- Fixed Panel Must be 1/2" (12 mm) Thick
- 1/2" (12 mm) Glass Fixed Panel From Which Door is Hinged/Clamped Can't Exceed 22" (559 mm) in Width, or 84" (2.13 m) in Height
- Door Width Not to Exceed 31" (787 mm)*
- Door Weight Not to Exceed 117 Pounds (53 kg)*
- Must Use P190S Wall Mounting Brackets Fastened to the Vertical Wall on the Fixed Panel From Which the Door is Hinged/Clamped. A Minimum of Two Brackets Must be Used, Positioned no More Than 10" (254 mm) Down From the Top Edge of the Glass, and 10" (254 mm) Up From the Bottom Edge of the Glass.
- Only a Fixed Panel Fastened to a Vertical Wall Can be Used to Hinge/Clamp From. No Hinging/Clamping From a Fixed Panel Fastened to Another Fixed Panel.
- Fixed Panel From Which the Door Hinges/Clamps Must Have Valid Bottom Support (May be Other Clamps or U-Channel, Does Not Have to be P190S Wall Bracket Referred to in Drawings). Panels Up to 12" Wide (305 mm) Require Only One Clamp (Clamp Attached to SRPPH07 is Adequate). Panels Over 12" Wide (305 mm), and Up to 22" (559 mm) Require Two Clamps at Bottom of Fixed Panel.

* Applies to Any Door Using SRPPH07 Hinge (Differs From Usual Senior Prima Series Maximum Capacity)

TYPICAL MOUNTING EXAMPLES

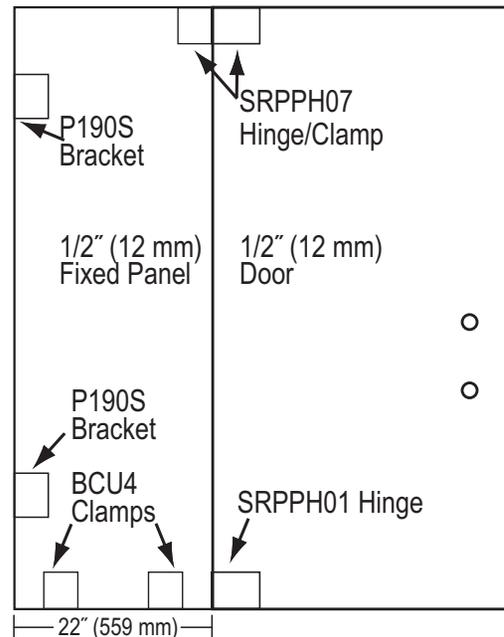

Typical Installation
Showing 22" Wide (559 mm)
1/2" (12 mm) Thick Fixed Panel
SRPPH01 Hinge Used at Bottom of Door

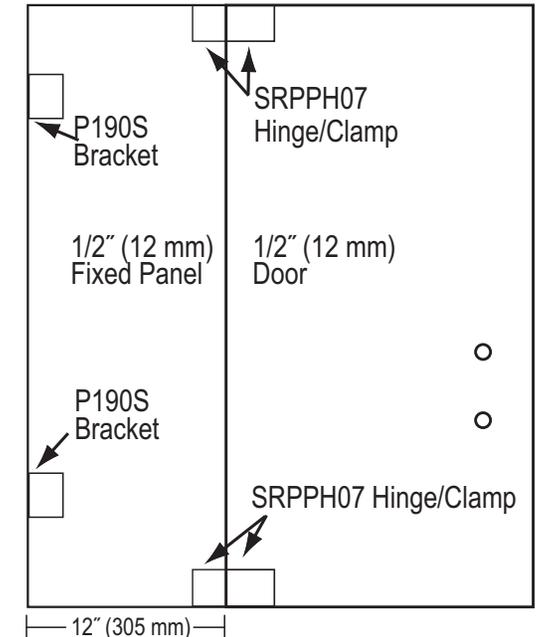

Typical Installation
Showing 12" Wide (305 mm)
1/2" (12 mm) Thick Fixed Panel
SRPPH07 Used at Top and Bottom of Door

SENIOR PRIMA

Hinge with U-Clamp



Cat. No. SRPPH07



Important Information:

Do Not Fabricate Glass Prior to Qualifying for Design and Installation Criteria Shown on Page 4H-8G

TYPICAL INSTALLATION

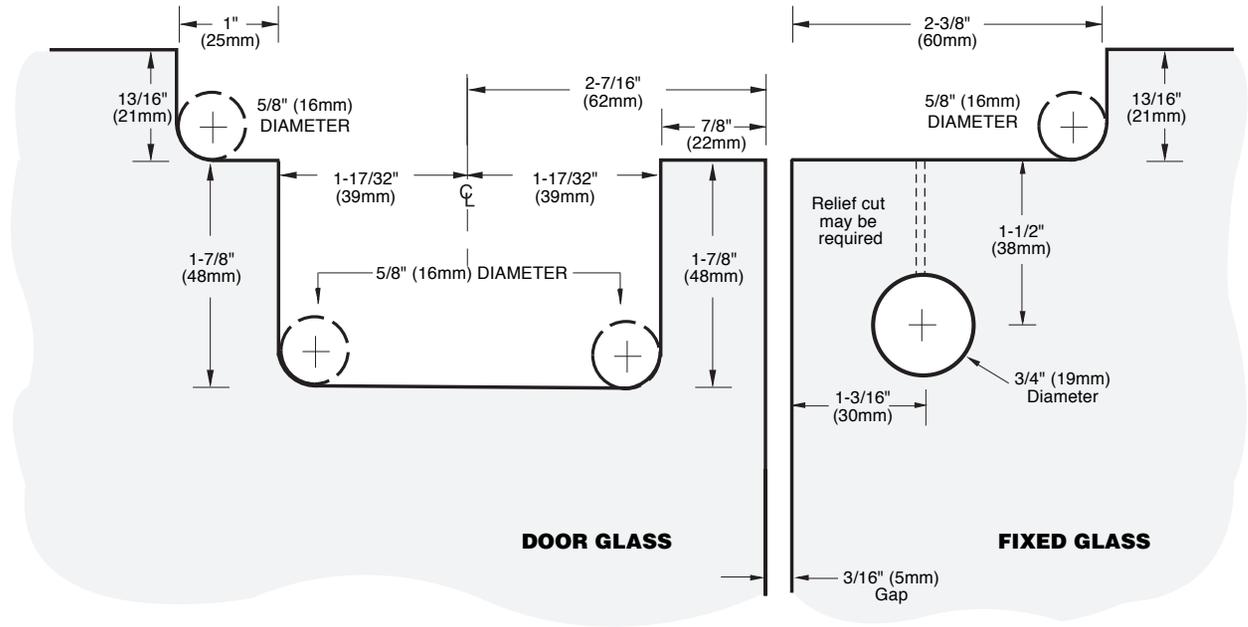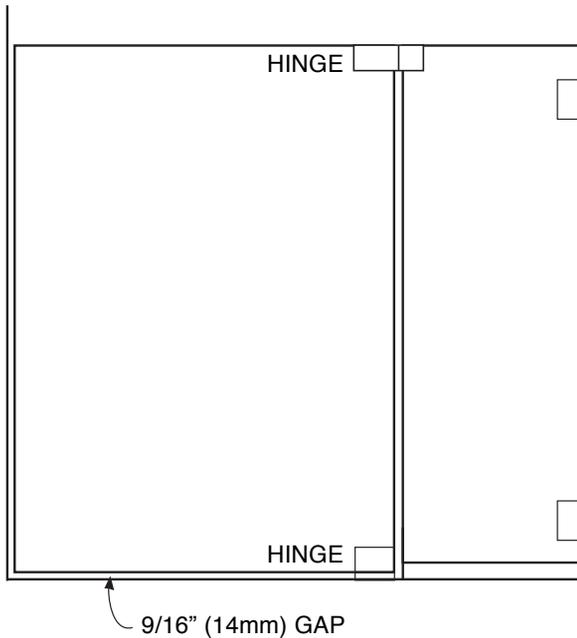


SENIOR PRIMA

Hinge with U-Clamp

Cat. No. SRPPH07

Top Flush Mount Method

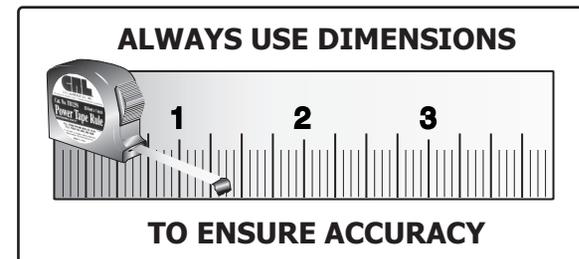

4H-8H





C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

Important Information:

Do Not Fabricate Glass Prior to Qualifying for Design and Installation Criteria Shown on Page 4H-8G

TYPICAL INSTALLATION

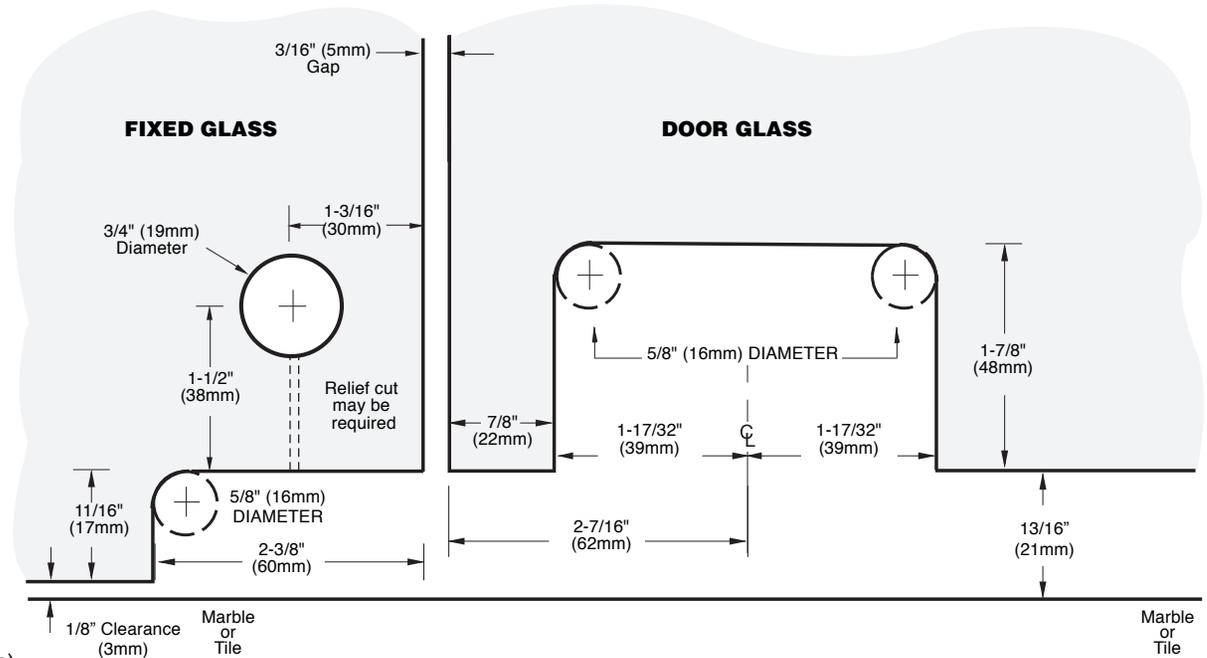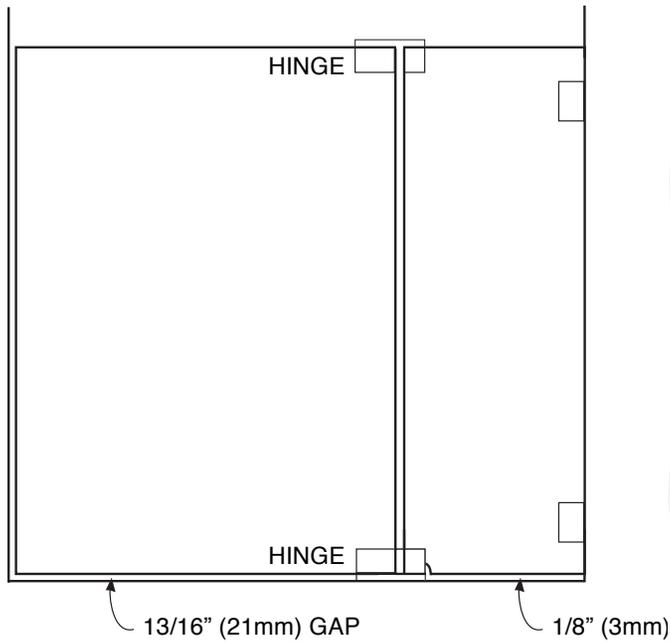

SENIOR PRIMA

Hinge with U-Clamp

Cat. No. SRPPH07

Bottom Mount Method

